
ANVIZ® | Intelligent Security

C2 Pro

Professional Fingerprint & Card Terminal

Quick Guide V1.1

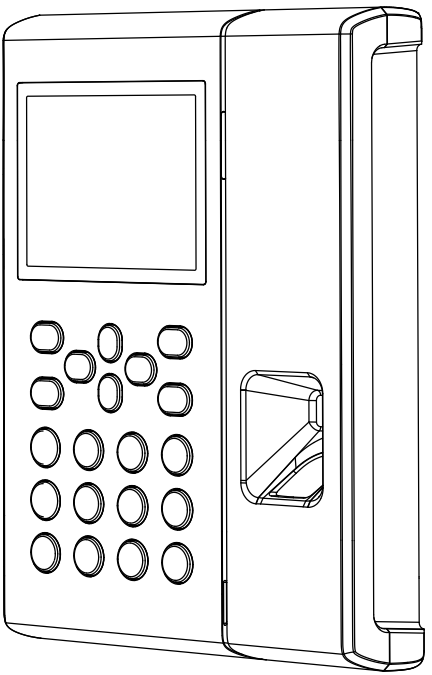

www.anviz.com

ANVIZ® | Intelligent Security

C2 Pro

Professional Fingerprint & Card Terminal

Quick Guide

V1.1



About Anviz


Founded in 2001, Anviz is a global leader in the field of intelligent security including Biometric, RFID and Surveillance. Cutting edge R&D, ISO certified manufacturing and global brand recognition provide our partners with the fast track to success!

Anviz is at the forefront of biometric, RFID, and surveillance technologies. Through constant R&D, ISO certified manufacturing and global brand recognition, Anviz is an industry leader. Producing high-quality, cost-effective security solutions have helped amass a global client base of over 60 million customers in over 100 countries.


For more information, visit www.anviz.com, or email us press@anviz.com

2015 © Anviz Global. All Rights Reserved. Due to the consistent improving of the product, this specification and appearance is subject to change without notice.

Topology of Device Connection with Network and Software

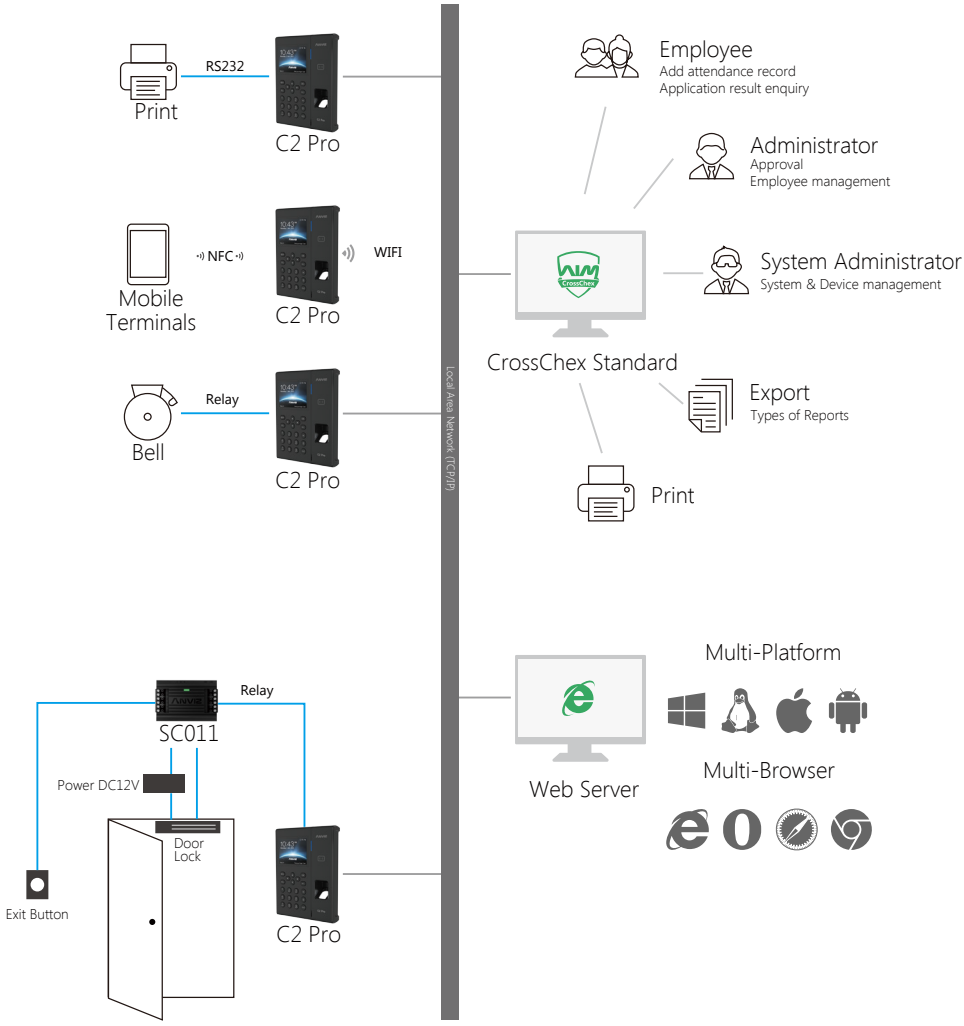

Device functions instruction

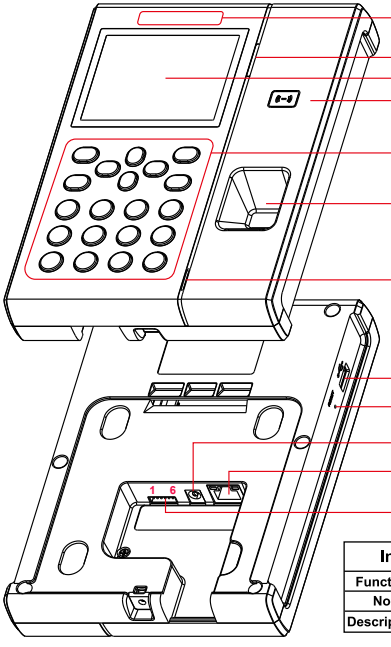


1. Wifi Antenna Location
2. Indicator Light
3. LCD Display
4. Card reader location
5. Keypad
6. Fingerprint capturer window
7. Speaker
8. USB Host Interface
9. Reset port
10. Power DC Input port
11. RJ45 network interface
12. Extended function interface

Instruction of extended function interface


Function	RS232			Relay		
No.	1	2	3	4	5	6
Description	TXD	RXD	GND	COM	NO	NC

Installation exploded-views

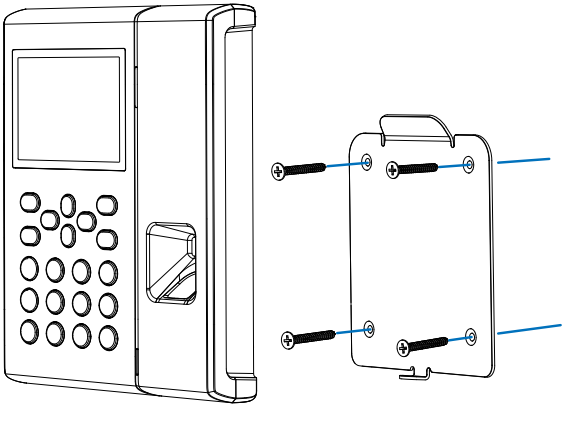


Device setting and management

1. Enter Administration interface

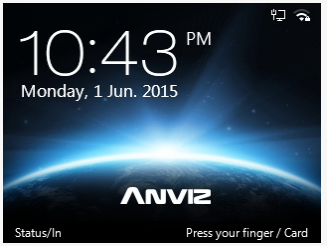


First interface after starting

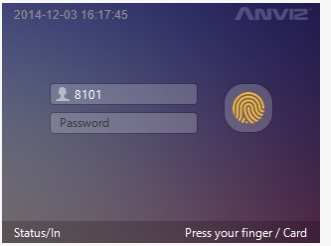

Press key "M/Back", input administrator account (0)and password(12345)

* Administrator password can be changed, take reference to USER manual.


2. WiFi Setting

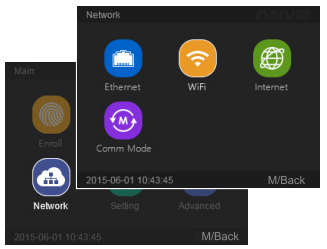

Choose "**Network**", press OK to enter "**Network**" interface, choose " **WiFi**" , press **OK** to enter.




Choose"**Option**"as "**Active**", IP mode as "**DHCP**", then press key"▼"to "**Choose WIFI**", enter **OK** to search WiFi automatically.

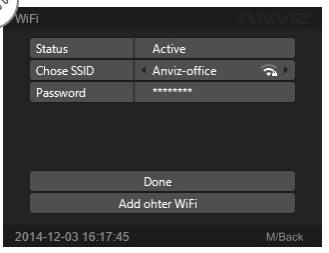


Press key"◄""►"to choose"**ESSID**", then input right"Password", press key "▼"to"Done".

3. User Registration




Choose " **Add**", press **OK** to enter Add User Interface.




Choose " **User**", press **OK** to enter.

Choose " **Enroll**", press **OK** to enter Enroll FP Interface.

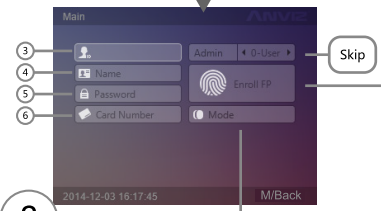



Enroll FP : The default is the first right-hand thumb registration, press "◄""►" to select the registered finger, follow the prompts to complete the registration 1-10 fingers, press the **OK** button to proceed to the next;



Choose **Verify Mode**, press **OK** to enter Mode interface, choose "**System default**".


3 Fill " **User ID number**" (Like user work ID), press **OK** to next.

4 Fill " Name". Press "Fn" to start Input, press "Fn" to switch Input, after input done, press **OK** to next.

5 Fill " Password" (for user password authentication), press **OK** to next.

6 Add " Card Number" (for this user card verification), put card on device card reader logo, after card number is read, press OK to next.

4. Record Export



Record Export: ("**Data**" > "**Export**" > "**Record**") Insert USB disk, press "◄""►" to choose **Export**, press **OK** and wait Progress finish.