1.Introduction

This exit button is no-touch infrared exit button with tuya smart APP **(Tuya version is optional）** . It's very stable and sensitive,with automatic adaptability to ambient temperature and humidity,do not affect by the weather or temperature. Output the NO or NC signal when recognize the gesture . The indicator light is red when it's in standby, and the indicator light is green when the signal is recognized.


2.Features

Feature	Description
Operating Voltage	DC9-DC12V
Operating Current	<600mA
Operating Temperature	-30℃~60℃
Operating Humidity	20%-80%
Dimension	86*86*23mm
Weight	82g

3. Wiring diagram


No	Function	Color	Description
1	12V	Red	Positive power supply
2	GND	Black	Negative power supply
3	NO	Blue	Relay NO end
4	COM	Purple	Relay COM end
5	NC	Orange	Relay NC end

4. Common power supply diagram

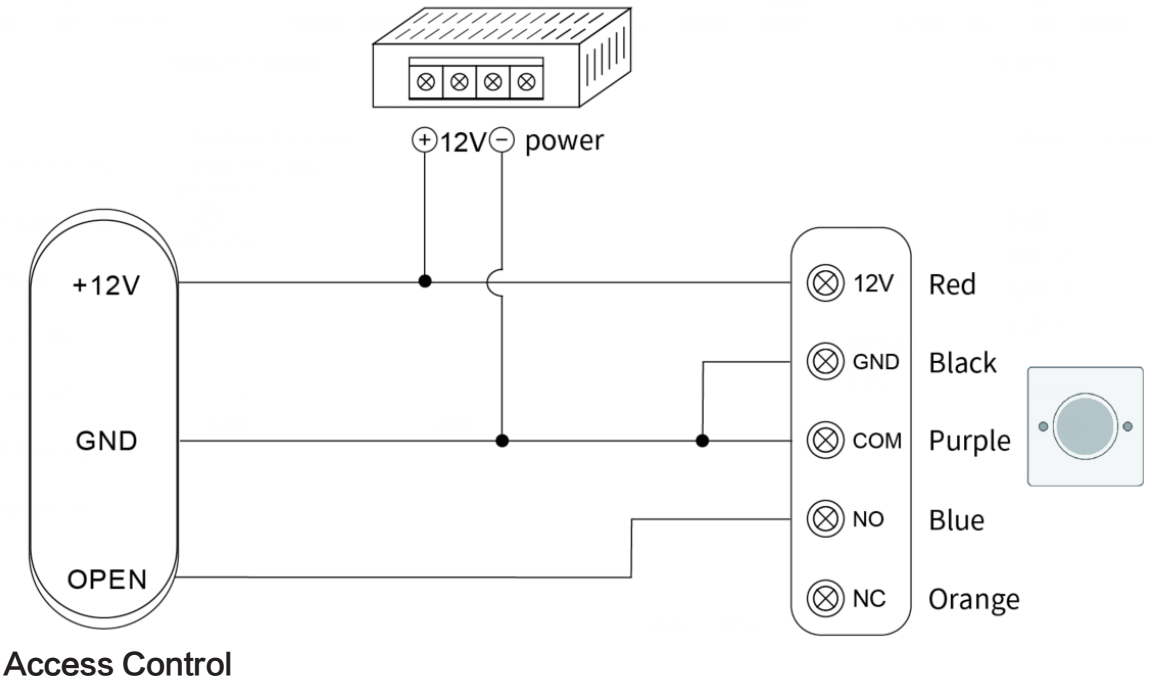

Access Control

5. Access Control Special Power Supply

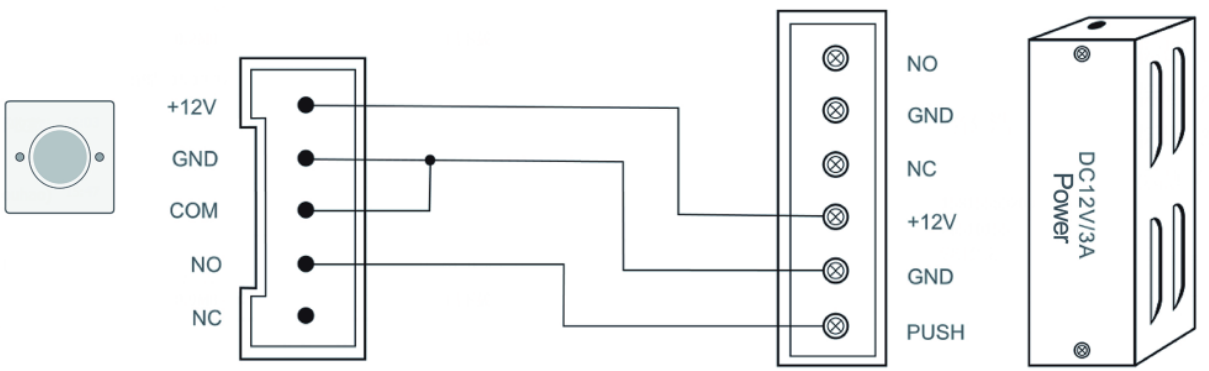

No−touch sensor switch

Access Control Power

6. Installation

●Fix back cover on the wall about 1.2 meters above the ground;
●Weld the wire solidly and wrap it with insulation tape;
●Fasten the panel to the back cover;

7. Wi-Fi Matching (Optional)

Wave your hand quickly,enter into matching status when indicator light flashing.Please refer to Tuya Wi-Fi manual to connect to mobile phone.