
Reolink Duo 3 PoE


Reolink Duo 3 PoE captures stunning 16MP resolution footage and also merges two images for an expansive 180° viewing experience. Utilizing advanced technology, Reolink Duo 3 PoE can detect and classify potential objects such as people, vehicles and animals, providing reliable and targeted alerts. Thanks to the PoE technology and the ultra-wide angle of the camera, it is enough to achieve dual wide-field surveillance through just one network cable to transmit power and data. More convenience, more security.

1. Specs

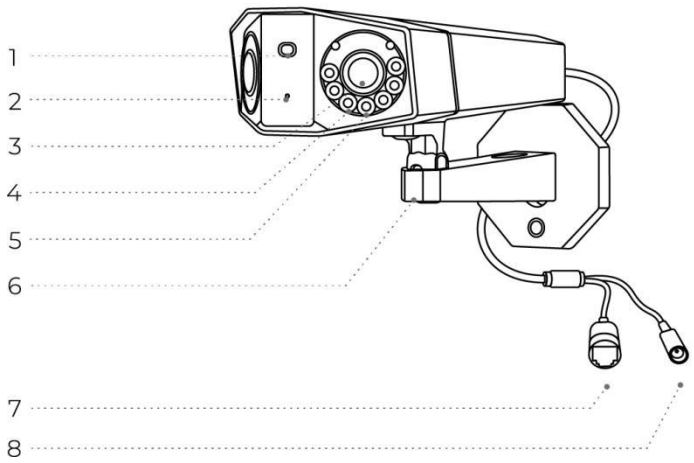

1	Daylight Sensor
2	Mic
3	Lens
4	Spotlights
5	Infrared Lights
6	Mounting Bracket

7	Ethernet Port
8	Power Port

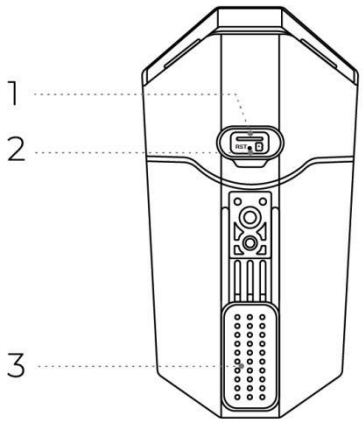

1	microSD Card Slot
2	Reset Button
3	Speaker

2. Setup and Install

Set up the Camera

What's in the Box

Note: The package content may vary and update with different version and platforms, please take the below information only for a reference. And the actual package content are subject to the latest information on the product selling page.



Reolink Duo 3 PoE *1



1m Network Cable*1



Quick Start Guide*1




Surveillance Sticker*1



Mounting Plate *1



Pack of Screws*1




Mounting Hole Template *1



Waterproof Lid *1

Connection Diagram

Before initial setup, follow the steps below to connect your camera.
1. Connect the camera to a PoE injector with an Ethernet cable.
2. Use the power adapter to power on the PoE injector and connect it to your router.

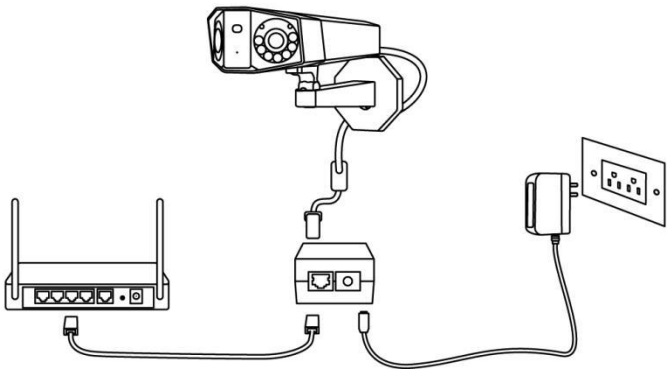


Note: You can power the camera with a PoE switch, PoE injector, Reolink PoE NVR or a DC 12V power adapter (not included in the package).

Set up the camera on the App

Here is a guide on how to initially set up the camera via Reolink App.


Step 1. Tap the icon ⊕ in the top right corner.

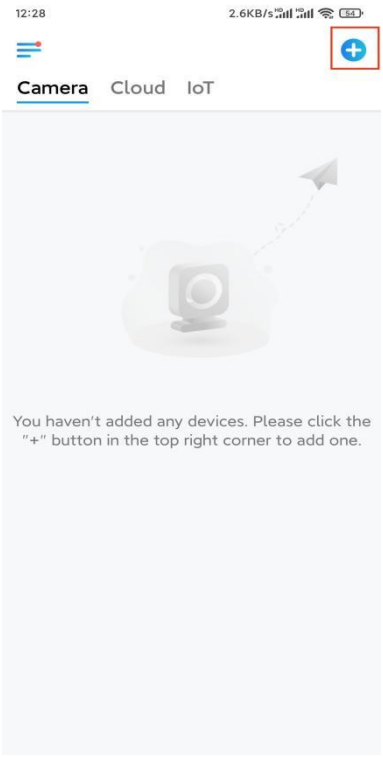


Note: If you've enabled the **Add Device Automatically** option on the App's Settings page, you can tap this device on the **Devices** page and turn to **Step 3** directly.


Step 2. Scan the QR code on the back of the camera. You may tap **Light** to enable a flashlight when setting up the camera in a dark environment.

If the phone doesn't respond, please tap **Input UID/IP** and then manually type in the UID (16-digit characters under the QR code of the camera). Then tap **Next**.

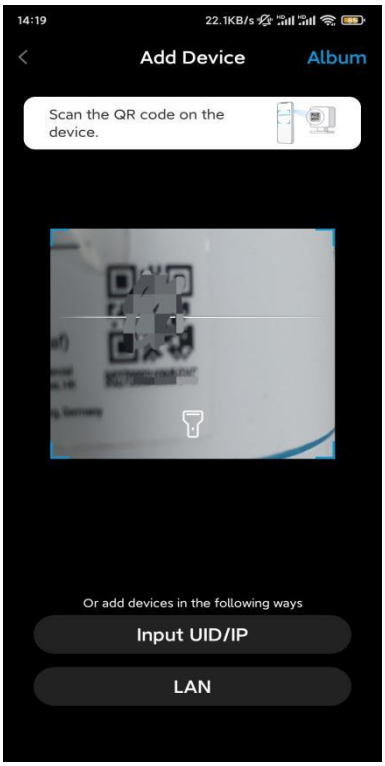


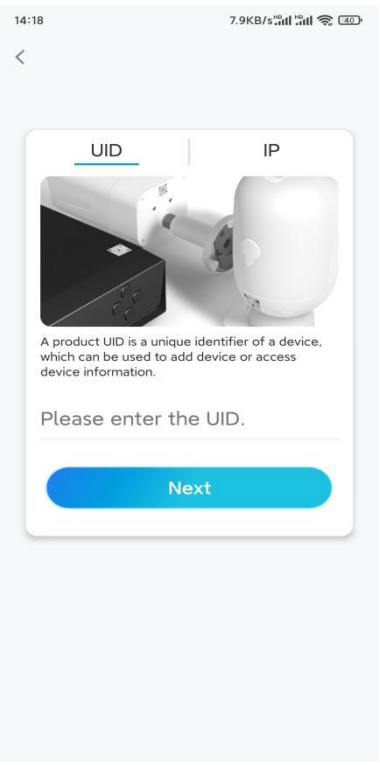


Step 3. Create a login password for your camera. Then tap **Next**.

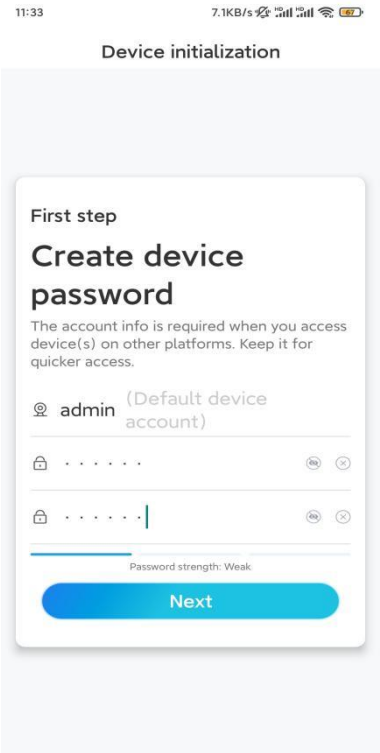

Step 4. Name your camera. Then tap **Next**.

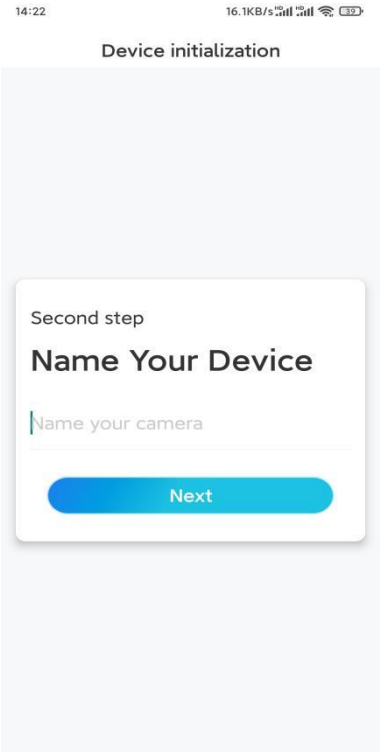

Step 5. Initialization finished! You can start live viewing now.

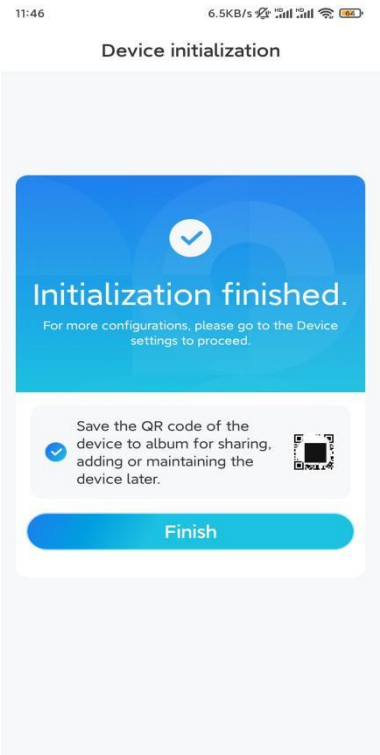

Install the Camera

We offer you guides on different scenes in which the camera could be installed. Check out them respectively.


Mount the Camera to the Wall

Step 1. Screw the camera onto the wall.


- Drill holes in accordance with the mounting hole template.
- Next, secure the mounting plate to the wall with the upper two screws and hang the camera on it.
- Then lock the camera in position with the lower screw.



Note: Use the drywall anchors included in the package if needed.
Step 2. To get the best field of view, loosen the adjustment screw on security mount and turn the camera.

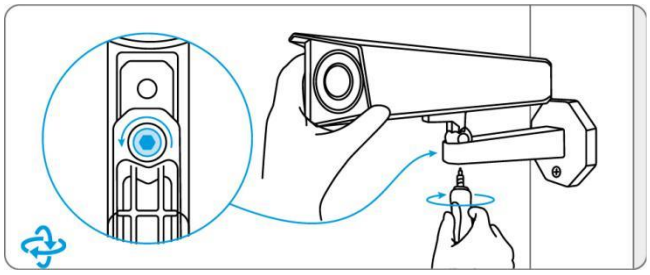

Step 3. Stiffen the adjustment screw to lock the camera.

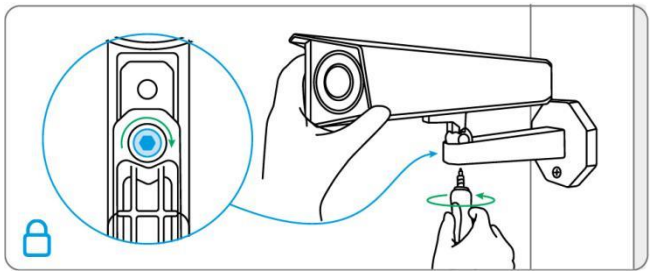


Mount the Camera to the Ceiling

Step 1. Screw the camera onto the ceiling.


- Drill holes in accordance with the mounting hole template.
- Next, secure the mounting plate on the ceiling with the upper two screws and hang the camera on it.
- Then lock the camera in position with the lower screw.



Step 2. To get the best field of view, loosen the adjustment screw on security mount and turn the camera.

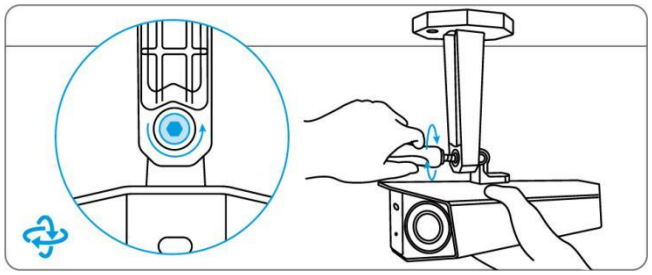

Step 3. Stiffen the adjustment screw to lock the camera.

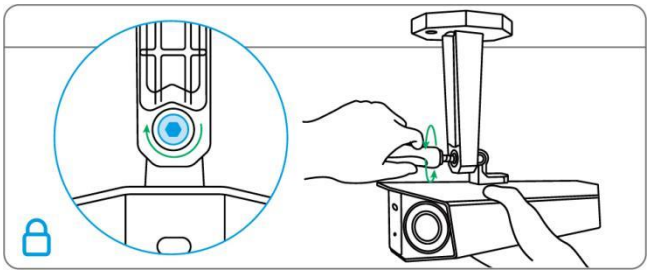

Finished! Now you may start using your camera.