DS-QAZ0206G1-S
Ceiling Secondary Speaker 6W




- Connecting the primary speaker for amplification.

▪ Specification

Speaker	
Rated Power	6 W
Impedance	8 Ω
Max. Acoustic Pressure	100 dBSPL
Sensitivity(1 m, 1 W)	93 dB
Direction	All directions
Frequency Response	300 Hz to 15 kHz
SNR	82 dB
Coverage Angle	Conical Coverage: 130°
Interface	
Audio In	Fixed resistance input × 1 ，8 Ω *The primary speaker(6 W, 8 Ω) can be connected to a maximum of 1 secondary speaker(6 W, 8 Ω).
General	
Operating Temperature	10 ℃ to 50 ℃
Material	Device body: plastic; Mesh cover: metal
Dimension	Ø179 mm × 77.5 mm (Ø7.05" × 3.05") (Hole Size: 160 mm)
Package Dimension	255 mm × 243 mm × 175 mm (10.04" × 9.57" × 6.89")
Weight	Approx. 0.3 kg (0.66 lb.)
With Package Weight	Approx. 0.45 kg (0.99 lb.)
Color	White
Packing List	Device × 1 Mesh cover × 1 Regulatory Compliance and Safety Information × 1
Operating Humidity	＜90% (No condensation)


▪ Wiring

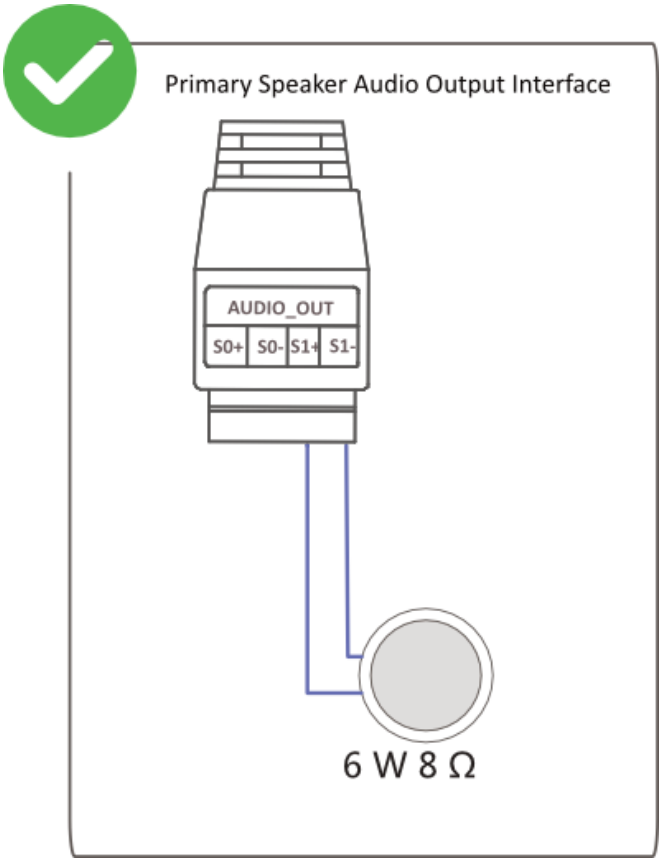


▪ Available Model

DS-QAZ0206G1-S

▪ Dimension

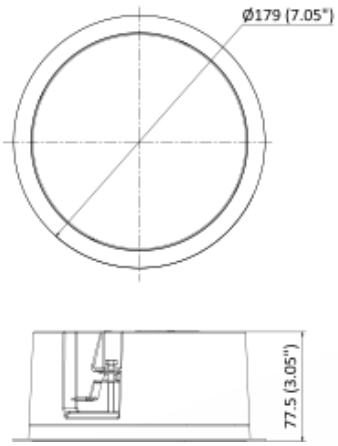



Unit: mm (inch)

Diagram of Back Interface



Red wire clamp is for positive pole. Black wire clamp is for negative pole.

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®