
DS-QAE0203G1-V
Analog Ceiling Speaker 3W



- Adopting a composite paper fiber sound basin, the sound quality is clear and bright
- With the design of powerful steel spring clamp, the installation is fast and safe
- Support ceiling mounting installation with a simple appearance

▪ Specification


Speaker	
Impedance	8 Ω
Speaker Unit	5.25'' × 1
Coverage Angle	Conical Coverage: 95°
Audio	
Rated Power	3 W
Sensitivity	91 dB ± 3 dB
Max. Acoustic Pressure	95 dB
Frequency Response	90 Hz to 20 kHz
Interface	
Audio In	Rated voltage , 100 V
General	
Material	Shell: ABS; Mesh enclosure: iron mesh
Operating Condition	-20 °C~50 °C (-4 °F to 122 °F), humidity: 95% or less
Dimension	Ø170 × 64 mm (Ø6.69" × 2.52")
Package Dimension	173.5 × 173.5 × 67 mm (6.83" × 6.83" × 2.64")
Weight	Approx. 435 g (0.96 lb.)
With Package Weight	Approx. 500 g (1.1 lb.)
Packing List	Device × 1 Regulatory Compliance and Safety Information × 1
Mounting Hole Dimension	Ø148 mm (Ø5.83")


**The device should be used together with amplifier.*

▪ Available Model

DS-QAE0203G1-V

▪ Dimension

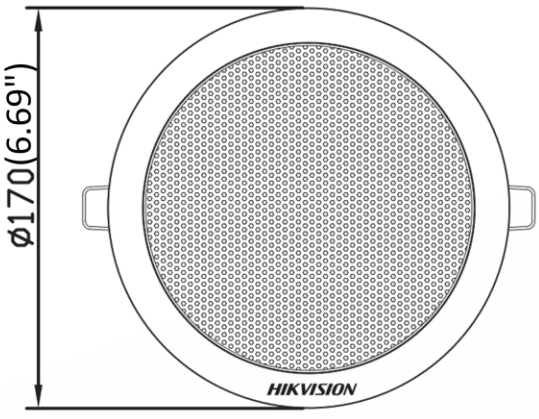

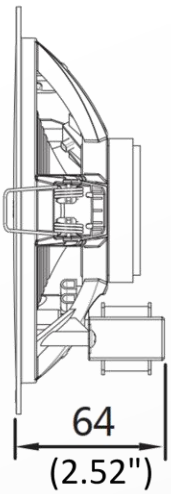

Unit: mm(inch)

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®