
5806 Pleven, Bulgaria
58, Kliment Ohridski Str.
Web: www.dmtech-ltd.com
E-mail: office@dmtech-ltd.com

OPERATING INSTRUCTIONS FOR SERVICE PERSONNEL

PANEL FP 9000

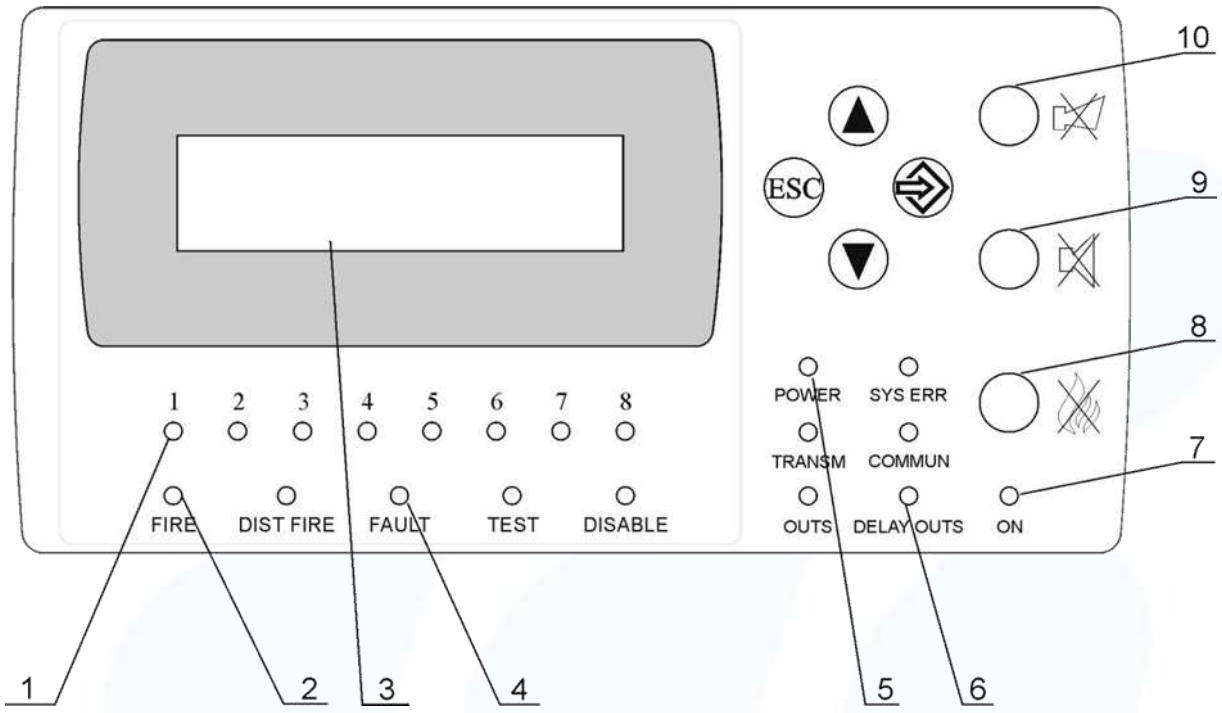

1. **Individual fire and line fault indicators**
2. **General fire indicator**
3. **Display**
4. **General fault indicator**
5. **Power failure indicator - mains and battery**
6. **Indicator for entered delay time on outputs**
7. **General indicator of power supply availability**
8. **„Reset fire“ button**
9. **„Stop sound panel“ button**
10. **„Stop sirens“ button**

1. DUTY MODE

This is the panel's normal mode. There are no faults or fires on the lines. The display (pos. 3) shows "PROTECTION" and the astronomical time. The power availability indicator (pos. 7) is lit. The programmed output delay indicator (pos. 6) may also be lit.

2. Personnel action in case of a "DANGER" signal

In the event of a fault, the panel sounder is activated.
The display shows the exact fault - no mains or battery power, fault in the relevant line (individual line indicator lights yellow), fault in a controllable output, etc.
The sound signal is stopped by pressing the "Stop sound panel" button (item 9).
Contact the service technician for follow-up instructions. Lack of mains power is a self-recovering fault and the panel will settle into "Standby" when power is restored.

3. Personnel action in case of "FIRE" signal

- The audible alarm on the panel is activated and the red indicator on the corresponding line is lit. The display shows information about the line where the fire has occurred, a text message about the location of the fire alarm and the time remaining until the sirens sound.
- The sound signal is stopped by pressing the "Stop sound panel" button (pos. 9).
- Go to the location indicated by the panel and check for an occurred event. If there is in fact a fire, proceed according to the "Instructions for personnel action in case of fire"
- If the panel activation is "false" look around the fire detectors and the displayed indicators and look for the cause of the activation.
- When the time delay on the outputs expires, the sirens are activated. They can be stopped by pressing the "Stop sirens " button (pos. 10).
- Returning the panel to Duty mode is done by pressing the "Reset Fire" button (pos. 8).