fire and security production

A-R2P

CONTATTO MAGNETICO A VISTA

SURFACE MOUNTING MAGNETIC CONTACT



DESCRIZIONE
Contatto magnetico in plastica ABS. Montaggio a vista.

CARATTERISTICHE TECNICHE

Materiale, colore:	ABS bianco (o marrone)
Forma:	rettangolare
Dimensioni:	mm 46,5x9x12
Utilizzo / Montaggio:	a vista
Collegamenti elettrici:	2 fili
Tensione massima:	100Vcc
Corrente massima:	1A a 100Vcc
Tamper:	si, 2 fili
Livello di protezione:	2
Lunghezza del cavo:	25cm
Temperatura operativa:	-25°C / +60°C
Classe ambientale:	IV
Grado di protezione:	IP65
Conformità:	EN50131-2-6
Fabbricato in:	Italia, da FDP


DISEGNO TECNICO
Disegno tecnico e quote in millimetri. Disegno non in scala.

DESCRIPTION
Magnetic contact in ABS. Surface mounting.

TECHNICAL FEATURES

Material, colour:	ABS, white (or brown)
Shape:	rectangular
Size:	mm 46.5x9x12
Use / Fixing:	surface mounting
Electric connection:	2 wires
Voltage (maximum):	100Vdc
Currente (maximum):	1A at 100Vdc
Tamper:	yes, 2 wires
Protection level:	2
Cable length:	25cm
Working temperature:	-25°C / +60°C
Environment class:	IV
Protection grade:	IP65
Conformity:	EN50131-2-6
Made in:	Italy, from FDP

TECHNICAL DRAW
Technical draw and size in millimeters. Draw not in scale.

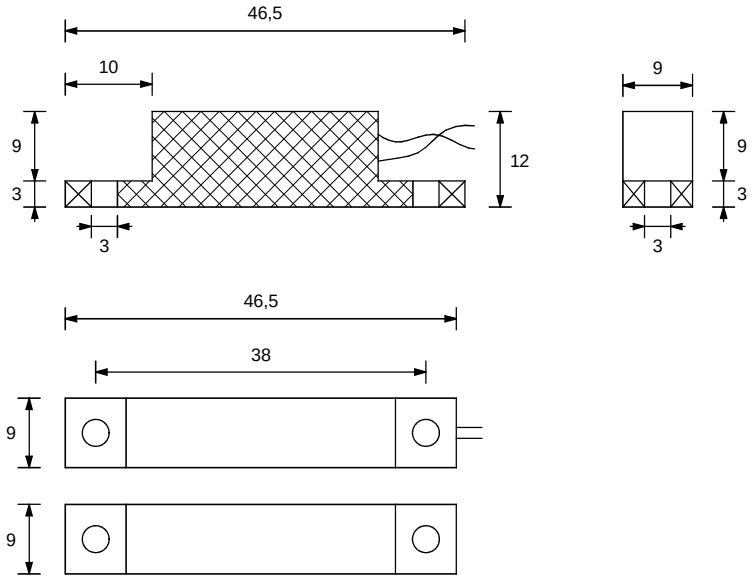

L'azienda si riserva di apportare eventuali modifiche senza preavviso. La garanzia convenzionale dei prodotti è valida 12 mesi dalla data di rilascio del documento fiscale che ne prova l'acquisto.

The manufacturer reserves the right to apply or revise modifications to its equipment without any prior notice. The conventional warranantee is valid for 12 months starting from the date of the sales document to proof of purchase released.

CE 2015 0068

FDP International Group S.r.l. - Via Pierobon, 127 - 35010 LIMENA (PD) - ITALY
Tel.+39 049 767249 - fax +39 049 767898
E-mail: info@fdpinternational.com - www.fdpinternational.com - P. IVA 02601740281