
F/UTP 4Pairs cable- Category 5E-PVC/LSZH

Description	FTP CAT5e 4P-PVC/LSZH
Standard	ISO/IEC11801、TIA-568-C.2 、YD/T1019
Carton Dimension	----
Cable Packing	Wooden Tray & Carton

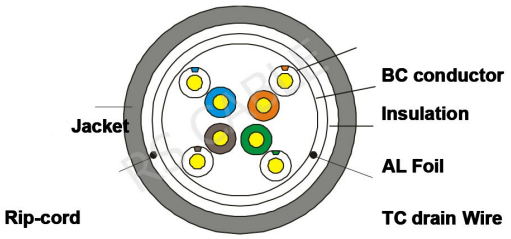

Construction

Conductor	23%CCA	Insulation colors	Blue,White/Blue	Rip Cord	yes
Conductor Dia.	0.50mm±0.01		Orange,White/Orange	Jacket	PVC/LSZH
Insulation	HDPE		Green,White/Green	Jacket Colors	Multiple
Insulation Dia.	0.98mm±0.03		Brown,White/Brown	Jacket Out Dia.	5.6mm±0.4mm
Drain wire	0.50mmCCA	Shielded	AL Foil	Average Thickness	0.5±0.05mm

Electrical Characteristics

Fluke channel test 60M+

Impedance(1-100MHz)	100±15 Ohm	DC Conductor Resistance (Ω/100m) max	12,5
Delay Shew ns/100m (1-100MHz)	≤45	DC Resistance Unbalance(%) max	5,0
Capacitance(nF/100m) max	5,6	NVP	69%