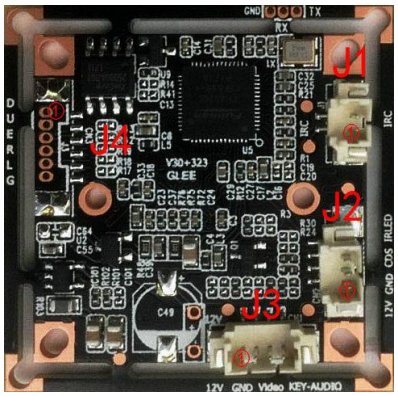



Features:

- 1/2.9" SONY_IMX323　CMOS
- Support AHD TVI CVI CVBS high definition transfer
- 1080P@25、1080P@30。
- Long Distance, No delay
- Support OSD/UTC
- Adopt 2D-DNR, Better Low light quality
- Support ICR auto switch
- Support Dial the code、audio

一、Specifications:

V30E+IMX323	
Image Sensor	1/2.9" SONY_IMX323
Image System	PAL/NTSC
Resolution	1920 (H)×1080(V)
Min.illumination	0.01Lux full color
Electronic Shutter	1/25s～1/100,000s
Video Standard	AHD
Frame Rate	1920×1080@25 fps; 1920×1080@30 fps;
Lens	2.1/2.8/3.6
Video Out	1CH BNC AHD output, Support TVI/CVI/CVBS Mode
WDR	auto
SNR	>45db
White Belance	AWB
DR	76db
Advanced Function	2D_DNR
Working Environment	-25℃～+70℃,Humidity 95%
Power supply	DC 12V +/-15%,
Dimensions (mm)	38*38,32*32

二、The interface definition figure:

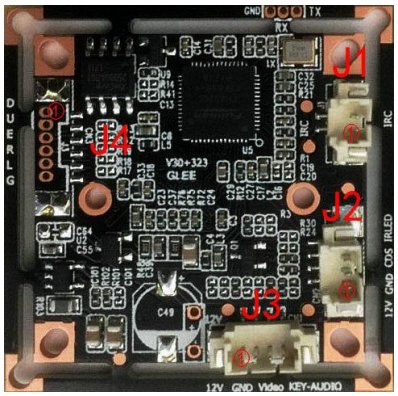

J1		J2		J3			
NO.	**Function**	**NO.**	**Function**	**NO.**	**Function**		
1	MOTOR_A	1	12V	1	+12V		
2	MOTOR_B	2	GND	2	GND		
		3	CDS	3	VIDEO		
		4	IRLRD	4		KEY	AUDIO
J4							
NO.	**Function**	**NO.**	**Function**				
1	DOWN	4	RLGHT				
2	UP	5	LEFT				
3	ENTERE	6	GND				