Industrial-Grade Media Converter

SF-MC1GE-SC-20KM

- Transmission Range: 20KM
- Transmission Rate: 1000Mbps
- Power Inout: DC5V1A


Product Features

- Adapter Power Supply
- Aluminium Alloy Abrasive Material
- Convenient


Product Figure



Dimension (mm)

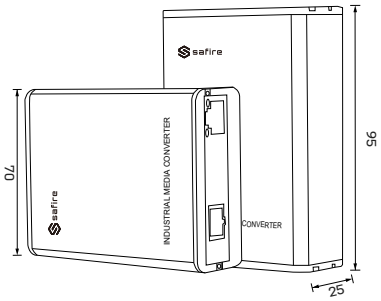

Installation Diagram



Specifications

Model	SF-MC1GE-SC-20KM
Protocol Standard	IEEE802.3z/ab
Network Interface	RJ45 10/100/1000Mbps Self-Adaption
	Transmission Distance: 100m
Fiber Interface	Single Mode SC
	Optical Fiber Type: Single Mode 9/125 μ m
	1310T/1550R (A) / 1550T/1310R (B)
	Transmission Rate: 1000Mbps
	Transmission Distance: ≤20KM
Performance & Specification	Forwarding Mode: Store Forward
	Transfer Mode: Full Duplex/Full Duplex Automatic Connection
	Network Latency: ≤150μs
Power	Power Type: External Power
	Power Input: AC100V~240V 50/60Hz
	Power Input: DC5V1A
	DC Socket: 2.5x5.0mm
Physical Specifications	Size:95*70*25mm, Weight: 0.43KG
Working Environment	Operating Temperature: -30°C~75°C
	Storage Temperature: -30°C~75°C
	Operating Humidity: 10%~90% Non-condensing
	Storage Humidity: 5%~90% Non-condensing
Certification	CE
	FCC
	RoHS 2.0
Warranty	Whole Device: 1 year
Package Content	Adapter *1 Pair; User Manual; Rack Mounted Earring *1 Pair;

※Specifications subject to change without notice.