HyPanel KeyPlus

Datasheet

New hassle-free smart control panel for your home

The akubela HyPanel KeyPlus, a smart control panel with an Android 13 operating system. The ALL IN ONE design integrates smart intercom, ZigBee gateway and home automation, and is compatible with plentiful ecosystem. Multi-modal interaction can be easily used by the whole family, offering the excellent smart home experience.

At a Glance

- **Excellent performance with Android 13 system**
- **4” multi-touch screen with energy saving mode**
- **6 touch buttons, suitable for the whole family**
- **2-gang relay, can connected to lights directly**
- **Smart intercom, ZigBee gateway, home automation ALL IN ONE**
- **EU standard flush mounted box;**



Basic Information

- Model Number: KS53-R2-EU
- Power Supply: 180 ~ 250VAC, 50Hz
- Built-in Relay Capacity: 16A
- Output: 2 gang, 1200W total;

  800W/gang for resistive;

  400W/gang for LED/CFL;

  Wire Range: 0.5 ~ 2.5mm² (24 ~ 12AWG)
- Power Meter: Supported
- Operation System: Android 13
- RAM/ROM: 2GB/8GB
- Wi-Fi: WiFi6, IEEE 802.11a/b/g/n/ac/ax
- Bluetooth: Bluetooth 5.3
- Ethernet Port: 1×RJ45, 10/100Mbps adaptive
- ZigBee: ZigBee 3.0
- ZigBee Sub-Device Limit: 128
- Microphone: Dual microphones, -26dBFS
- Speaker: Single speaker, 8Ω/1.5W

Appearance

- Material: V0 fireproof PC
- Button: 6 touch button
- Screen: 4” multi-touch screen
- Screen Resolution: 480×480 pixels
- Screen Brightness: 210 cd/㎡

Sensors Built In

- Proximity Sensor: 30 ~ 60cm
- Light Sensor: Low-level lux detection

akubela

10/F, No.56 Guanri Road, Software Park II, Xiamen 361009, China
Tel: +86-592-2133061 Ext: 7694 Fax: +86-592-2133061
Email: sales@akuvox.com Web: www.akubela.com


Working Environment

- Environment: For indoor use only
- Working Humidity: 10% ~ 90%RH, without condensation
- Working Temperature: -10℃ ~ 55℃
- Storage Temperature: -30℃ ~ 70℃
- IP Rating: IP20


Installation

- Installation: Wall flush mounting
- Flush Mounted Module: EU/UK standard
- Wiring Way: L- + N- wire required


Product Dimension Diagram (mm)




⑤ BOTTOM VIEW

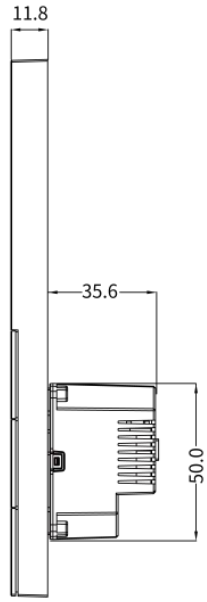


② RIGHT VIEW

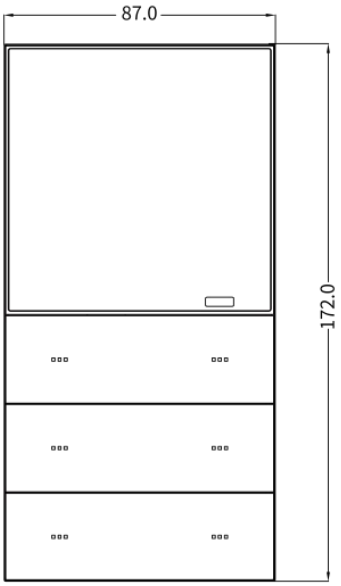


① FRONT VIEW

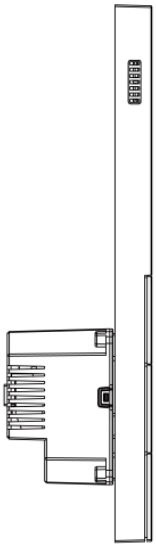

③ LEFT VIEW

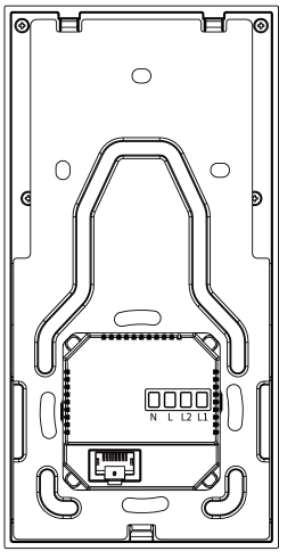

④ BACK VIEW



⑥ TOP VIEW

akubela

10/F, No.56 Guanri Road, Software Park II , Xiamen 361009, China
Tel: +86-592-2133061 Ext: 7694 Fax: +86-592-2133061
Email: sales@akuvox.com Web: www.akubela.com