DS-UPSB09xxB-R/TC
Battery Pack




▪ Specification


Model		DS-UPSB0924B-R/TC	DS-UPSB0948B-R/TC	DS-UPSB0972B-R/TC
Battery	Battery Type	VRLA (Lead acid maintenance free battery)		
	Typical Recharging Time	6～8 hours (To 90% of full capacity)		
	Capacity (Standard Unit)	12V/9Ah		
	Battery Number	4	8	12
	DC System Voltage (VDC)	24V	48V	72V
	Charging Current (Max.)	1.4A		
Environment	Operating Temperature	0°C～40°C		
	Humidity Range	0～95% (Non condensing)		
	Noise Level	＜40dB at 1 Meter		
Physical	Dimension W x D x H (mm)	144×399×209	191×460×337	191×460×337
	Net weight (kg)	13.5	28.5	38.5

▪ Physical Interface


DS-UPSB0924B-R/TC

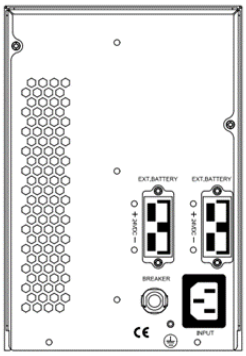

DS-UPSB0948B-R/TC

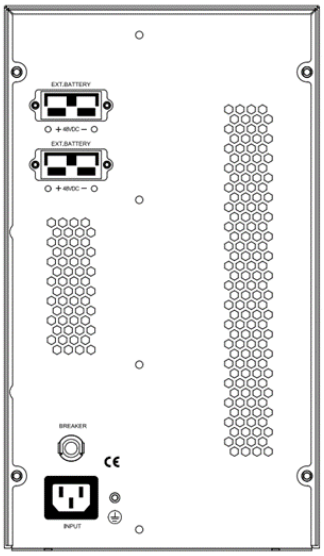

DS-UPSB0972B-R/TC

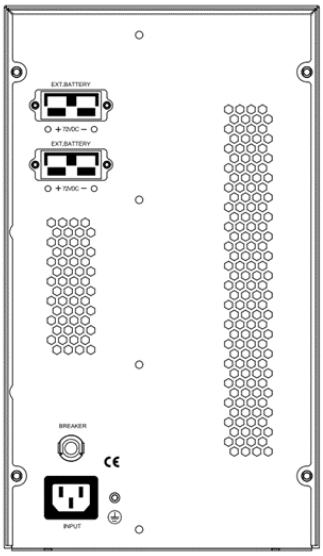

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION