

LE-N Series Floor Standing Network Cabinet





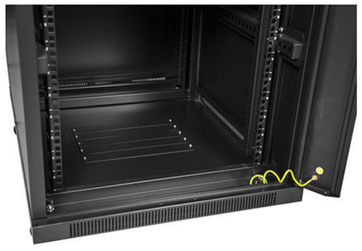



General description:


1. Classic model,disassembled stucture,can be flat packing an easy to transport
2. Removable side panel with latches,easy to install ,optional lock
3. Cable entry on the top and bottom,easy to manager cable
4. Adjustable feet and castors are available simultaneously
5. S-shaped mounting profile,free to move forward and back
6. Various optional accessories for common using

Material	SPCC Cold Rolled Steel
Loading Capacity	Static loading:800kg（on the adjustable feet and castor)
Degree of protection	IP20
Surface finish	Degreasing,Picking,Phosphating,Powerder Coated
Color	■ Ral9004 ■ Ral9005 ■ Ral7035
Certificate	CE,RoHS,EC60297-3


Capacity (U)	Width (mm)	Depth (mm)	Height (mm)	volume(cbm)
18U	600	600	899	0.22
		800		0.24
		1000		0.26
	800	800		0.29
		1000		0.32
22U	600	600	1075	0.24
		800		0.26
		1000		0.28
	800	800		0.31
		1000		0.33
27U	600	600	1297	0.27
		800		0.29
		1000		0.32
	800	800		0.34
		1000		0.36
32U	600	600	1517	0.28
		800		0.32
		1000		0.34
	800	800		0.36
		1000		0.40
37U	600	600	1738.5	0.31
		800		0.33
		1000		0.37
	800	800		0.40
		1000		0.44
42U	600	600	1958	0.33
		800		0.35
		1000		0.40
	800	800		0.53
		1000		0.55
45U	600	600	2091	0.37
		800		0.40
		1000		0.45
	800	800		0.55
		1000		0.60
47U	600	600	2180	0.40
		800		0.43
		1000		0.50
	800	800		0.57
		1000		0.65

Height is without castor, if need with castor, please add our standard castor JF01/JF02 75mm, heavy duty castor JF03 105mm

800mm width

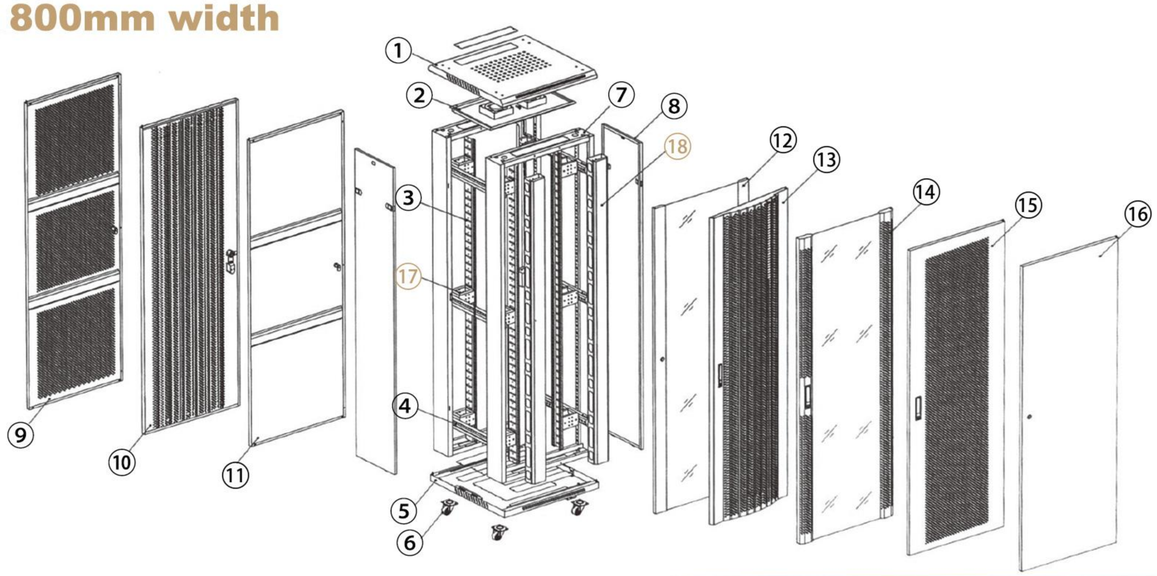

600mm width

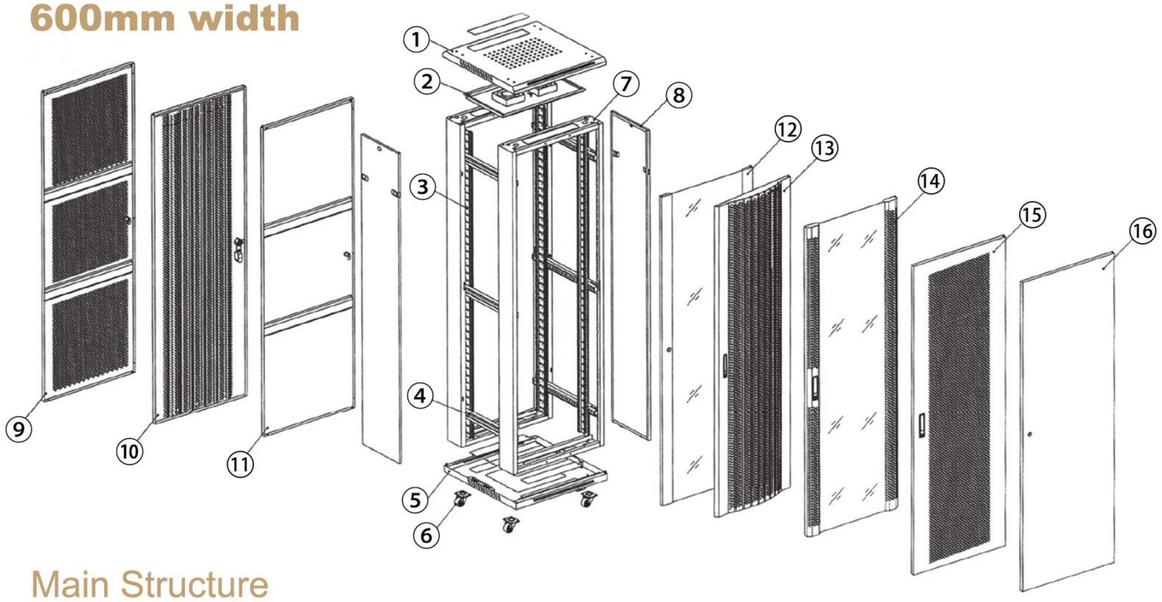

Main Structure

	Standard Parts	Thickness	Remark
1	Top cover	1.2mm	1pcs
2	Fan unit	1.2mm	1pcs
3	Mounting profiles (S-shaped)	2.0mm	4pcs
4	Mounting angle	1.2mm	32U≥6pcs 32U<4pcs
5	Bottom panel	1.2mm	1pcs
6	Castor&Feet		4pcs each
7	Frame	1.2mm	2pcs
8	Side panel	1.2mm	2pcs with quick release buckle
9	Door with hexagonal holes	1.2mm	1pcs

	Standard Parts	Thickness	Remark
10	High-density vented rear door	1.2mm	1pcs
11	Steel rear door without hole	1.2mm	1pcs
12	Tempered glass front door	1.2mm	1pcs
13	Arc vented front door	1.2mm steel + 5mm glass	1pcs
14	05J border glass front door	1.2mm	1pcs
15	Single vented front door	1.2mm steel + 5mm glass	1pcs
16	Steel front door	1.2mm	1pcs
17	Spacer	1.2mm	32U≥12pcs 32U<8pcs
18	Vertical cable management	1.2mm	2pcs

Items can be added:

Added	Remark
Fan	1pcs/2pcs with one plug (110V or 220V)
Side panel locks	2pcs JC01 small round lock
Fixed Shelf 1.2mm thickness	465*300mm; 465*500mm 465*600mm;465*700mm 465*900mm
Sliding Shelf 1.2mm thickness	465*300mm; 465*500mm 465*600mm;465*700mm 465*900mm
PDU	1U Alu type according to different country type
Logo Printing	Customized
Cable management	19inch
Brush panel	19inch
Blank panel	19inch
Vertical cable management	For 800mm width cabinets

Package1: Assembled Packing



Package2: Flat Packing

1.Top and bottom Package



2.Door Package



3.Frame Package

