Parts list:

Host, decoder, power adapter, sensor, spare sticker, certificate, manual.

Charge:

1 Insert the MICRO plug on the mobile phone charging port and charge the mobile phone.

2 The machine can be aimed at most of the market input 5.0V mobile phones and digital products power supply.

Security:

1, insert the MICRO plug in display communication port, display show charging status, automatically enter the host protection on standby, unplug the MICRO Plug the main alarm quickly.

2, Alarm circuit: cut or break sensor cable, alarm host.

3, Automatic deployment: refer to instructions for installing the OK mobile phone will automatically enter the host, fortification, to prevent the loss of mobile phone protection and forget the administrator.

4, when the external power supply is disconnected or power failure, the host stops charging the mobile phone, and the anti-theft function is used normally.

Decoder function and operation instructions:

1, The installation is complete, the host protection LED red light, the host to enter the standby state.

2, When the police situation, press the reset button on the back of the host, the host to stop the alarm sound.

3, the alarm occurs, press the decoder disarm button to stop the alarm sound, the host.

Change display and collection function:

1, When changing the display, unplug the MICRO plug, the host alarm, this is a normal phenomenon, with the decoder can be closed.

2, Remove the back, scrape, 3M tape and glue the new 3M onto the new display.

Electrical parameters and specifications:

Host
Power input: DC 5.5V ⎓ 10A
Output current: 1000/□ MAH
Output voltage: DC 5.1 V

Adapter
Power input: AC 100~260V 50/60Hz
Power output: 5.5V ⎓ 10000MAH

Decoder
Radio frequency remote control
Battery:GP23A 12V

Remote control distance: ≥20M

Fault analysis and troubleshooting:

1, The decoder does not respond
Please check that the indicator light on the decoder will flash when it is operated.
Please check whether the main engine is powered or not, and whether the power indicator is on or not.
Replace decoder battery, please.

2, The deployment, light is not bright.
Please check whether remote control has effect on host.
Please check the installation instructions manual to see if the OK is installed


This product is subject to change without further notice or other changes!

Alarm display

Instructions for use

(This shows that in the case of 860)


Model: 840 860
880 810

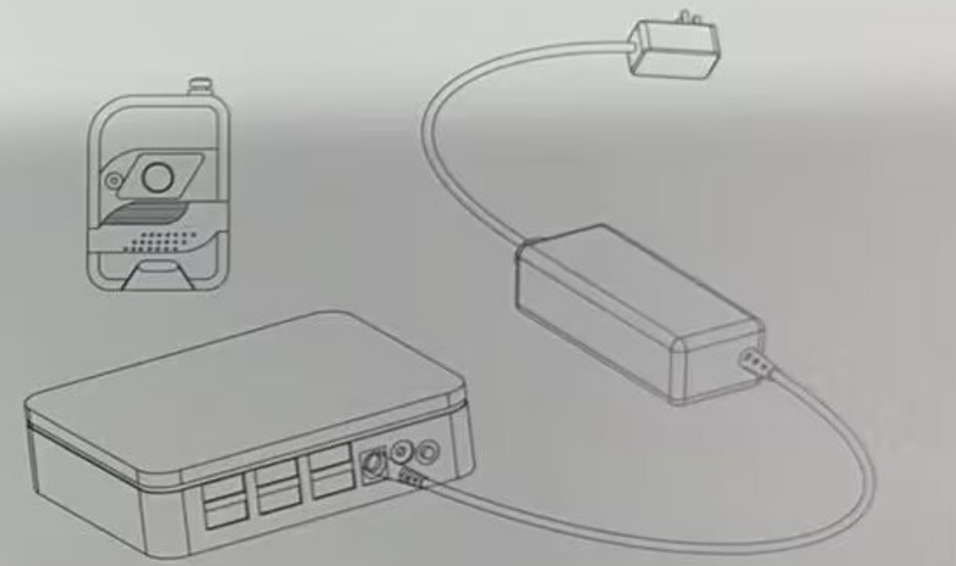




Product installation manual

Product part name:

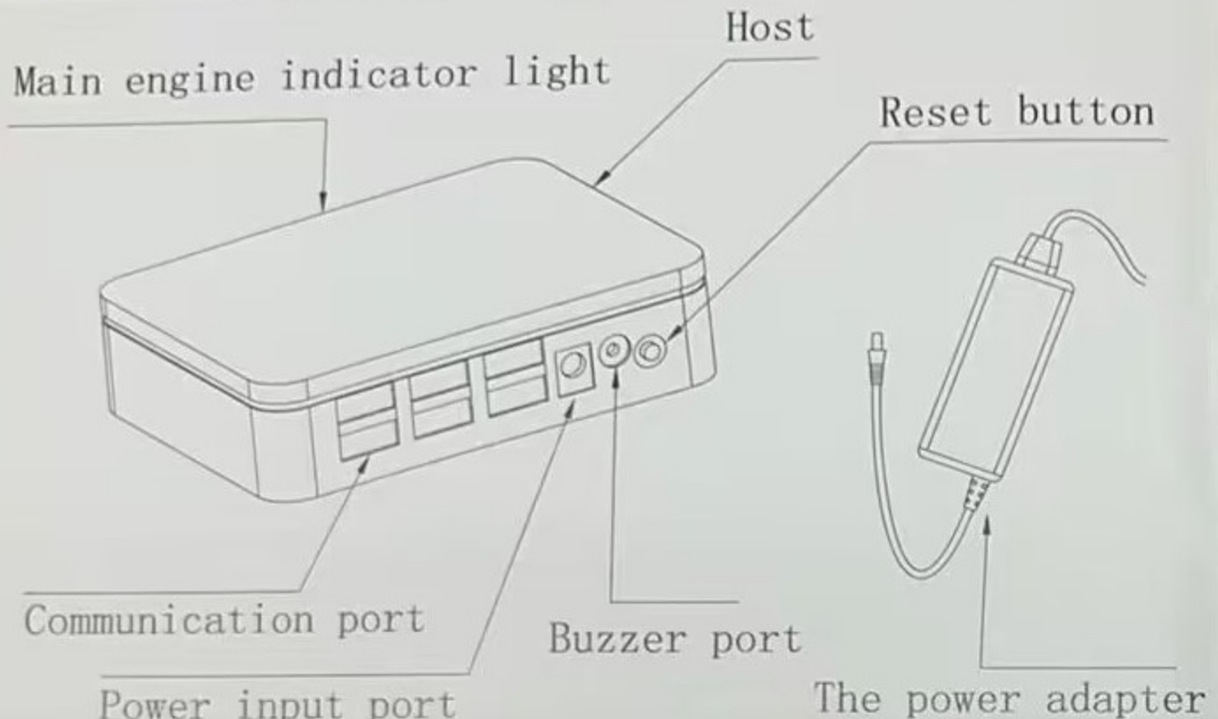

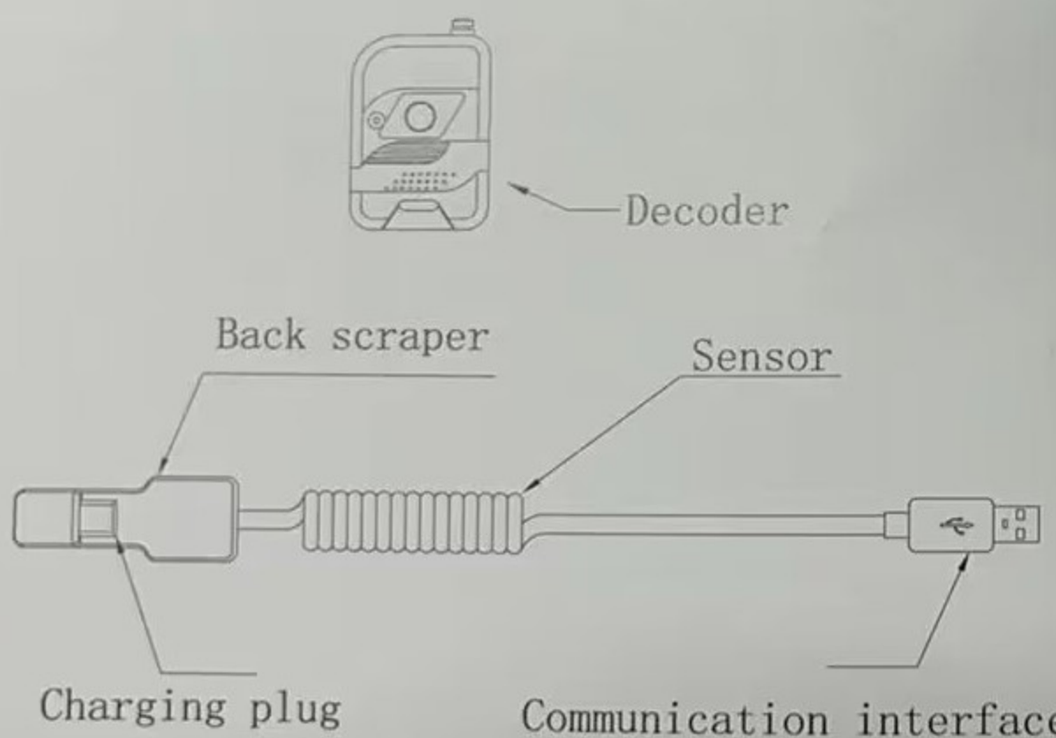


Installation guidelines


1. unpacking, removing the host and adapter, will The adapter is plugged in and the other is plugged in Main power input port.



2. insert sensor MICRO charging plug in hand,Charging port.

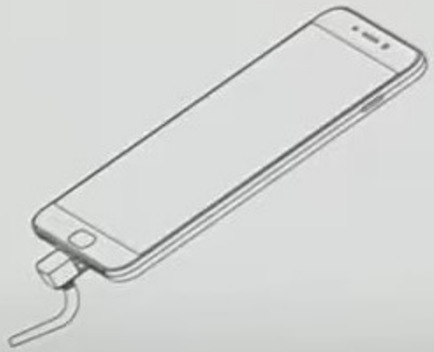

3. Remove the back sticking blade and 3M adhesive filmThe head is glued to the desired location of the phone.

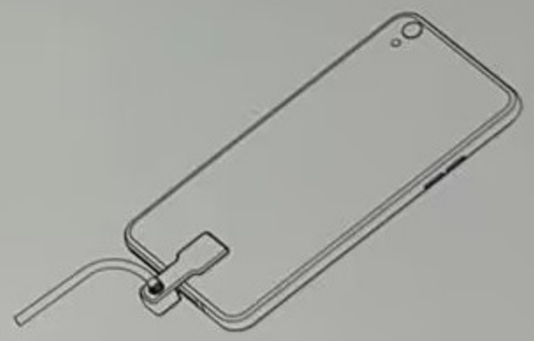

4. Insert the sensor into the host communication port, 2S clock after the protection indicator lights always display mobile phone charging. Status, installation effect diagram

