


3.Install and replace battery

（1）Tear off sticker on the back, remove three screws（2）Open the back base and install 18650 Li battery







4.Install method



1.Nail hook



2.Bracket fixing




3.Double-sided adhesive sticking

CE FC RoHS


Made in China


Infrared Thermometer User Guide

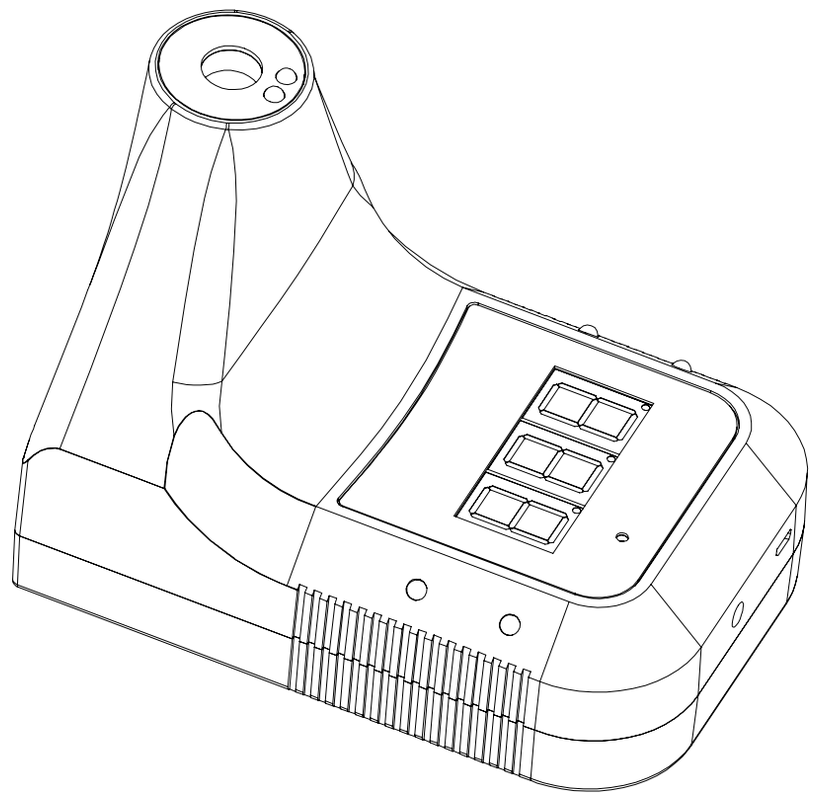



Model: K3

1.Introduction

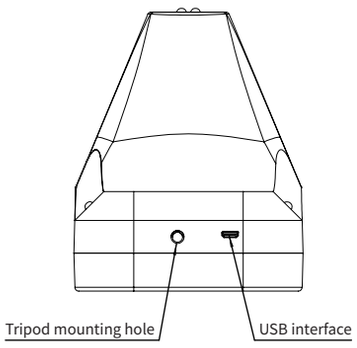



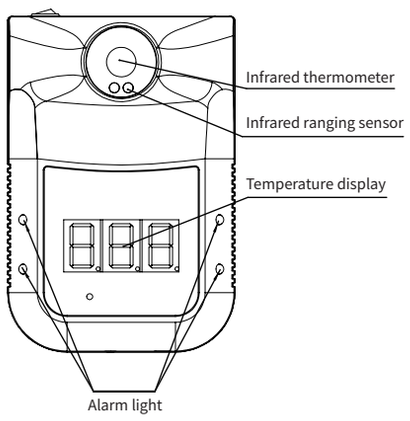

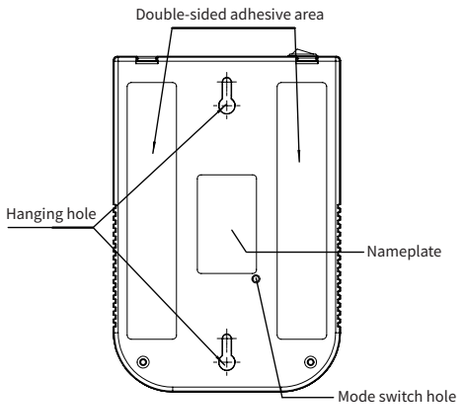

2.Specification

1. Accuracy: ±0.2 degrees
2. Abnormal automatic alarm: flashing +“Di Di” sound
3. Automatic measurement: measuring distance 5cm ~ 10cm
4. Screen: Digital display
5. Charging method:USB charging or battery(18650 Li-ion).
6. Install method: nail hook, double-sided adhesive sticking, bracket fixing
7. Environment temperature: 10℃~40℃ （Recommended 15℃~35℃）
8. Infrared measuring range: 0～50℃
9. Response time: 0.5s
10. Input: DC 4.2-5V
11. Weight: 350g
12. Dimensions: 170*115*140mm
13. Standby：About one week

3.Status Description

1. Standby: The red dot in the bottom of the display lights up in turn. (Fig. 1)
2. Insufficient power: The horizontal bar lights up in the middle of the display. (Fig. 2)
3. Normal temperature: Flashing green lights and alarm ‘Di’. (Fig. 3)



Fig. 1




Fig. 2



Fig. 3

4. Abnormal temperature: Flashing red lights and alarm ‘Di Di’.(Fig. 4)
5. Default:
   ‘Lo’: Ultra-low temperature alarm. (Fig.5)
   ‘H’ : Ultra-high temperature alarm.(Fig. 6)



Fig. 4



Fig. 5



Fig. 6

4.Operation Instruction

1. Temperature measurement: Front of the thermometer and approach it within 5-10 cm. (Fig. 7)

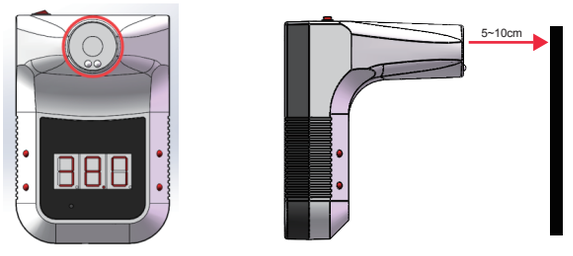


Fig. 7

2. Mode switching: There is a small hole on the back of the device (Fig. 8). You can use a 3mm diameter screwdriver to insert the hole and then press the button.
   (1) Temperature unit: Press ‘mode switch hole’ then select ‘C’ or ‘F’ (Fig.9, 10) C: Celsius F: Fahrenheit
   (2) Mode: Long press 3 seconds and select ‘b’ （Fig 11, 12）



Fig. 8




Fig. 9




Fig. 10




Fig. 11




Fig. 12