
Akuvox Smart Intercom

C313X-LP-2 Quick Guide

Unpacking

Please make sure the package contains the following items:

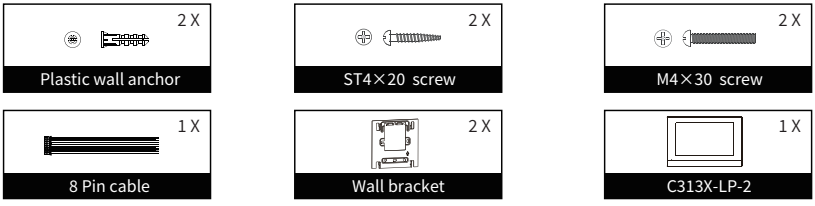


Product Overview

Front Panel




C313X-LP-2

Rear Panel

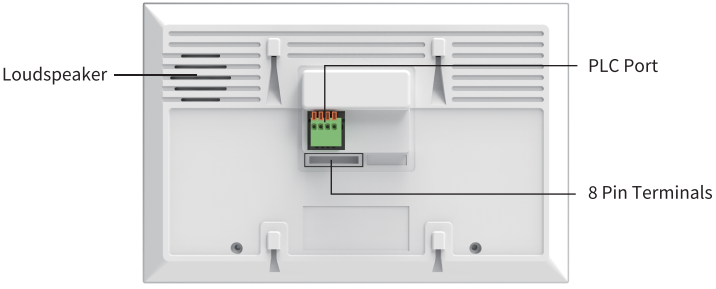


Installation


Without 86 embedded box in the wall




Mark two fixation holes through **wall bracket** on the wall, the distance between which is 60mm. Make sure the all cables can be passed from the middle of **wall bracket**.



Take down the bracket, then using a 5 mm hand dril to make the two fixation holes on the wall you marked before.




Use two **ST4×20 screws** to fix the wall bracket on the wall.




Once the fixation holes are made, insert the two **plastic wall anchors** provided.

With 86 embedded box in the wall




Make sure all cables in the 86 embedded box.



Fix the wall bracket on the 86 embedded box with two **M4×30 screws**.

Device Mounting

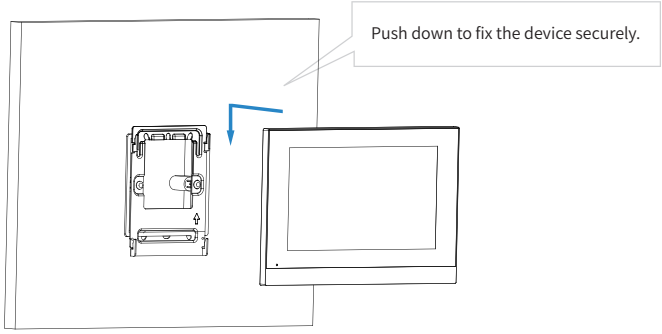

Configuration

1.After setting up network and power, press **Status** icon to check IP address (DHCP by default).
2.Launch web browser and type in the IP address to access web interface, login with username and password.(admin by default).
3.Register the device with your SIP account.(please refer to user manual for more information).

Operation

Make a call
Press **Intercom** key ,enter the callee's number or room address , then choose **Audio** or **Video** mode to call out.


Receive a call
When receiving a video call, users can choose **Audio** or **Video** mode to answer. However, if there is an audio call, users can only press **Audio** mode to pick up.

Unlock
During the talk, press the **Open Door** key Open Door in talking interface to unlock the door.

Monitor
Press Monitor key to receive the video from indoor IPC or community IPC any time.

SOS
Press **SOS** key SOS in case of an emergency.

Device Wiring

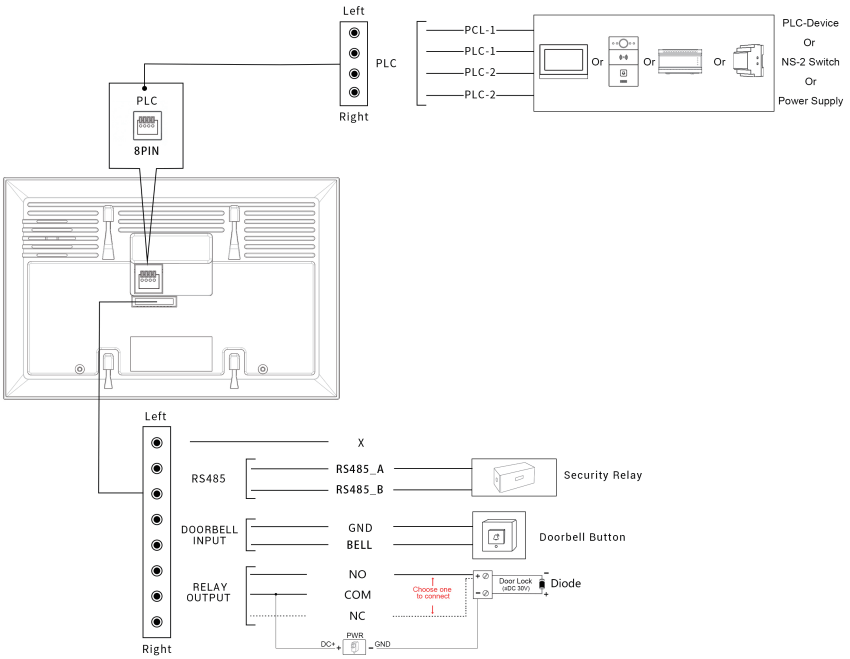

Notice Information

nformation contained in this document is believed to be accurate and reliable at the time of printing. This documen subject to change without notice, any update to this document can be viewed on Akuvox' s website: http://www. kuvox.com © Copyright 2025 Akuvox Ltd. All rights reserved.

AKUVOX (XIAMEN) NETWORKS CO., LTD.
ADD: 10/F, NO.56 GUANRI ROAD, SOFTWARE PARK II, XIAMEN 361009, CHINA
www.akuvox.com