IMPORTANT SAFETY INSTRUCTIONS

When using your Mylion Mini UPS,basic safety precautions should always be followed to reduce the risk of fire,electric shock & injury to persons,including the following:


- This unit is not waterproof.
- Do not expose this unit to moisture.
- Do not expose this to rain.
- Do not use this product near water, for example, near a bath tub,wash bowl,kitchen sink or laundry tub,in a wet basement or near a swimming pool.
- Do not attempt to disassemble.
- Only connect Ac Adaptors with power output of 12V 3.5A Max.
- Mylion Mini UPS should only be connected to Devices specified to operate on 12V 2.5A power source.

DESCRIPTION

Mylion Mini UPS is an Uninterruptible Power Supply which can be used as a standby energy back-up to power your device during a power outage. It is commonly used for WiFi Routers, Security Systems, Safety Monitoring Systems,Door Control Systems & Attendance Systems.



CONNECTING YOUR MYLION MINI UPS

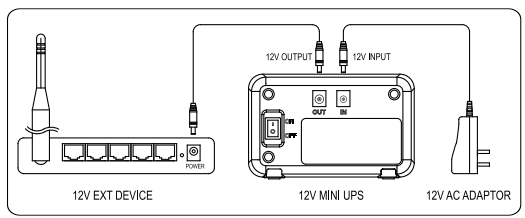

1.Put your Mylion Mini UPS **Switch ON**,the work LED become Red.
2.Connect the supplied DC cable to the Mylion Mini UPS DC Out&the other end to your device 12V Input,your 12V device start working right now.
3.Connect your 12V AC adaptor to DC IN of the Mylion Mini UPS the work LED become Green,the Charge LED become Blue, When the Mylion Mini UPS fully charged,the Charge LED become Green.
4.Mylion Mini UPS will supply power for up a few hours during power outage (when fully recharged).

LED STATUS INDICATOR

STATUS			LED	
Switch On	Input	Output	Charge	Work
Full charged	With	With	Green	Green
Full charged	Without	With	No	Red
Charging	With	With	Blue	Green
Full charged	Without	Without	No	Red
Low	With	With	No	No

SPECIFICATION

Model	Capacity	Input	Output
MU26	19.24Wh	DC12V 3.5A max DC5.5x2.1mm	DC12V 3.0A max DC5.5x2.5mm
MU48	29.6Wh		
MU45	37.0Wh		
MU68	44.4Wh		
MU626	57.72Wh		
MU635	75.6Wh		

STORAGE

1.Fully recharge before storing away.
2.If stored away for a long period Mylion Mini UPS should be recharged once every 3-5months.
3.Please do not store Mylion Mini UPS longer than 6 months storage temperature 0-45°C.

WARRANTY

IMPORTANT:
Satisfactory evidence of the original purchase is required for warranty service.

Warranty Period:
12 Months from the date of producing.

Terms of Warranty:

Mylion warrants to the original purchaser only that the Mylion Mini UPS will be free from defects in materials and craftsmanship for the duration of the warranty period,subject to the limitations and exclusions set out below.This warranty does not include any reimbursement or payment of any consequential damages claimed to arise from a Product's failure to comply with the warranty.

WHAT'S IN THE BOX

1x Mylion Mini UPS Uninterruptible Power Supply
1x DC Cable
1x Quick User Manual



WARNING:
1.Please read the instructions carefully.
2.Do not attempt to disassemble Mylion Mini UPS.
3.Do not crush,puncture or expose to temperature above 60°C.
4.Do not expose to rain (Mylion Mini UPS unit isn't waterproof).

SHANGHAI MYLION NEW ENERGY CO.,LTD.
Address: No.586 Qingda Road,Shanghai,Pudong,China
Email: sales@mylionbattery.com

MYLION Mini UPS

12V Uninterruptible Power Supply

Instruction Manual