
Akuvox Smart Intercom


A094
Quick Installation Guide


Unpacking

Before using the device, check the device model and ensure that the shipped box includes the following items:

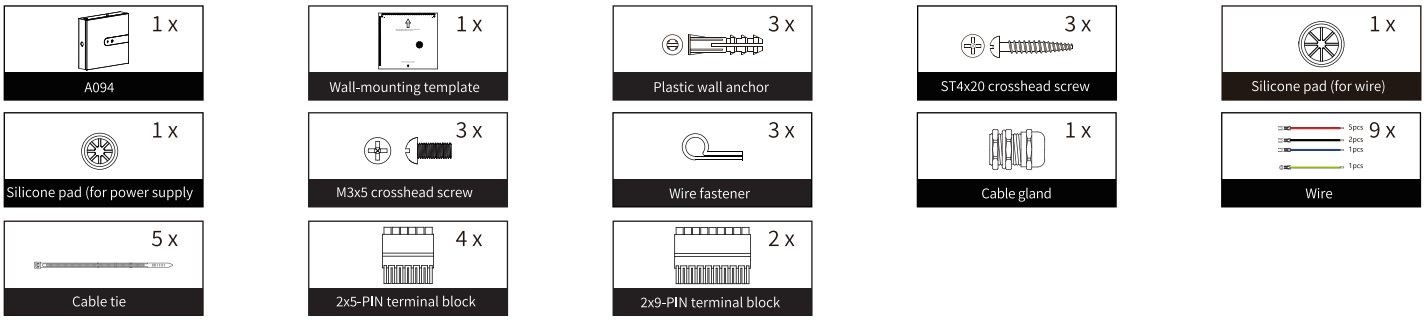

Product Overview

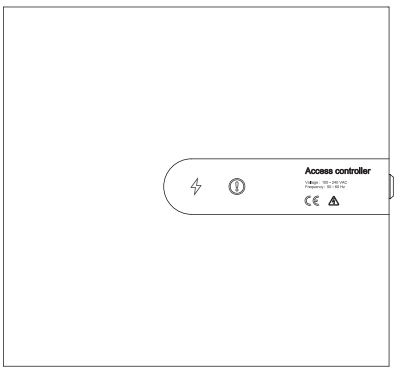

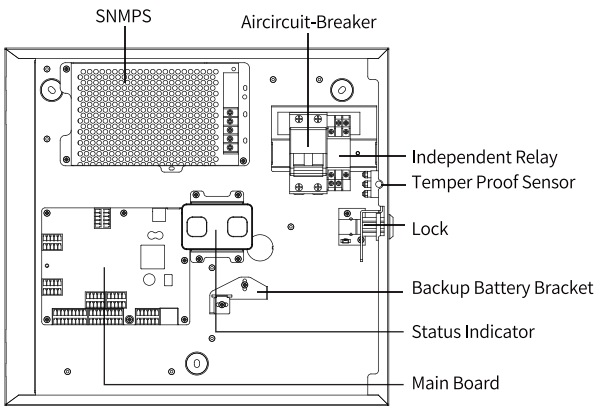

Before You Start

Tools needed

(not included in shipped box)


- Cat Ethernet Cable
- Crosshead Screwdriver
- Electric Drill


Voltage and Current Specifications


- It is suggested to use a suitable power cable to connect to the device' s 100–240VAC, 1.5A power supply to power it on.


Requirements


1.Place the device away from sunlight and light sources to prevent potential damage.
2.Do not place the device in the high-temperature, and humid environments or in surroundings impacted by magnetic field.
3.Install the device on the flat surface securely to avoid personal injuries and property loss caused by device' s falling.
4.Do not use or place the device near heating objects.
5.If installing the device indoors, please keep device at least 2 meters away from light, and at least 3 meters away from window and door.


Backlight


Direct sunlight


Direct sun through window


Indirect sunlight through window


Close to light

Warning!

1. To ensure safety, avoid touching power cord, power adapter, and device with wet hands,bending or pulling the power cord, damaging any components, and use only qualified power adapter and power cord.
2. Be careful that standing up on the area under the device in case of personal injuries cause by hitting the device.


Akuvox Smart Intercom

A094
Quick Installation Guide


Caution

1. Do not knock device with hard objects.
2. Do not press down hard on the device screen.
3. Do not expose device to chemical products, such as alcohol, acid liquid, disinfectants, and so on.
4. To prevent the device installation from becoming loose, ensure accurate diameters and depths of screw holes. If the screw holes are too large, use glue to secure the screws.
5. Use wet cloth clean device surface softly, and then wipe the surface with dry cloth for cleaning the device.
6. If there is abnormal situation of the device, including uncommon sound and smell, please power off the device and contact Akuvox Technical Team immediately.


Wiring Interface

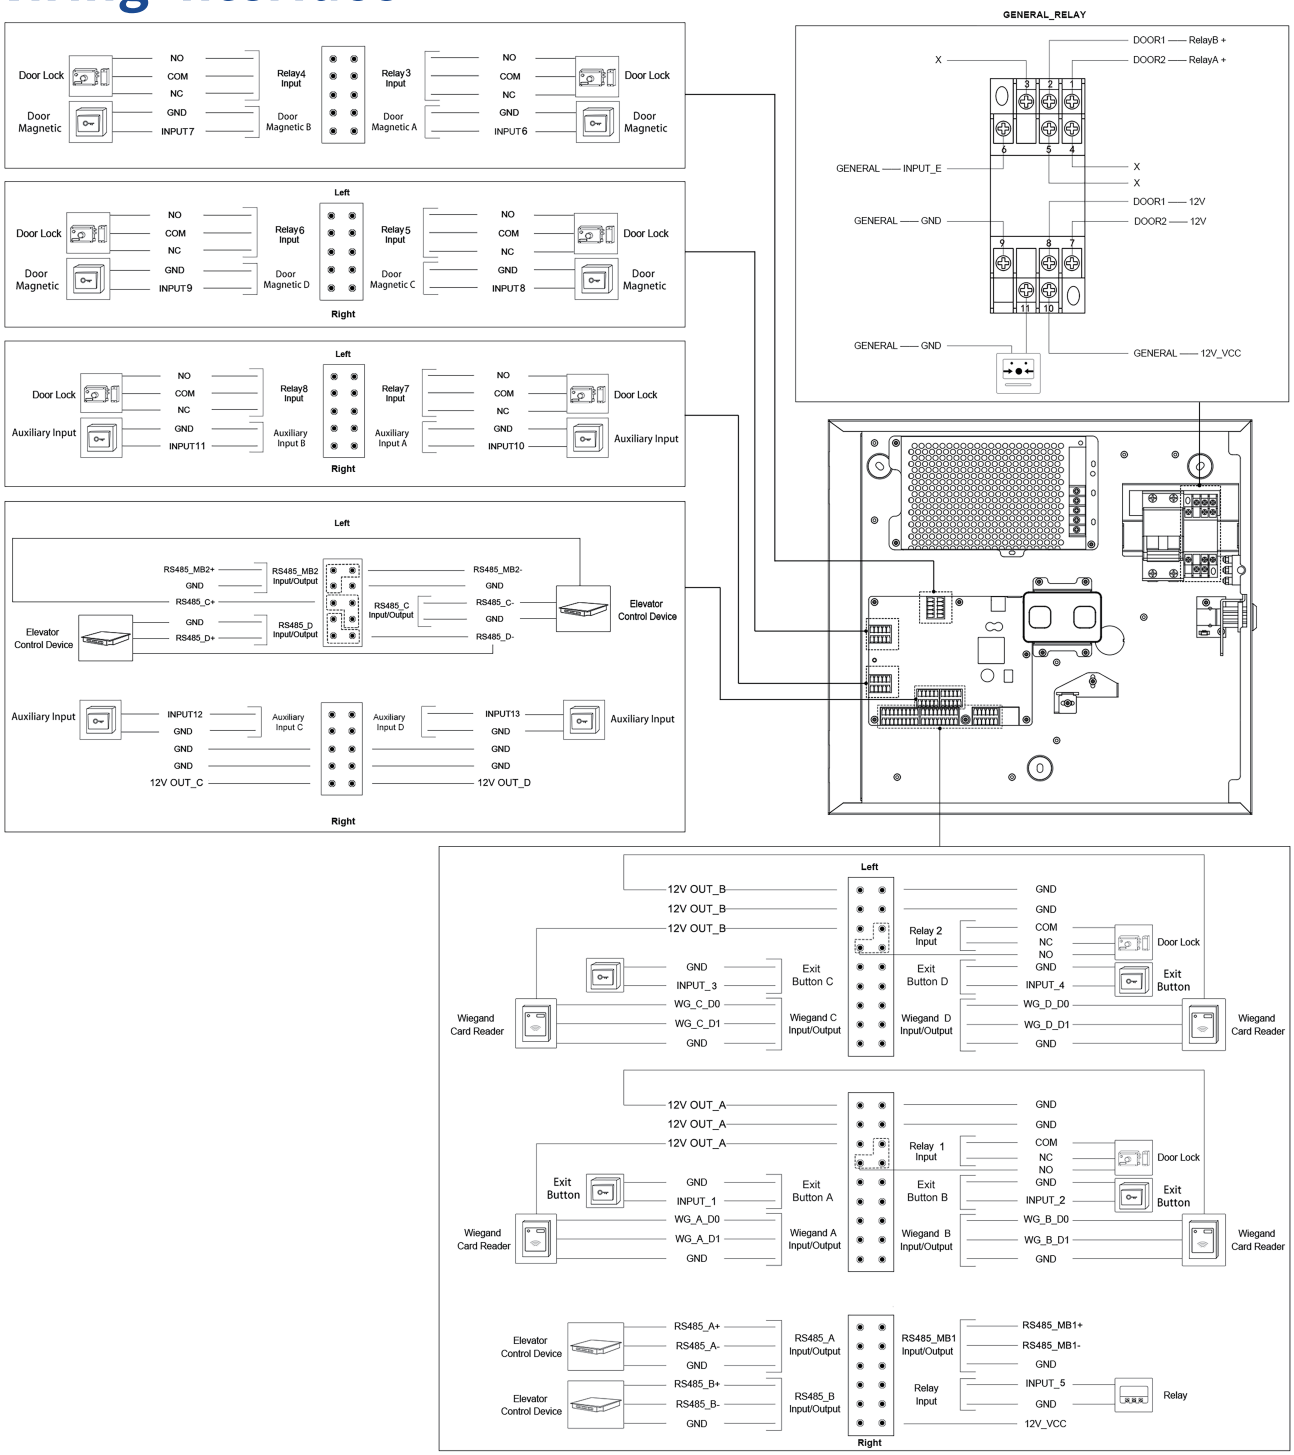


Installation




a. Stick the **wall-mounting template** on the wall where the device needs to be installed.
b. According to the screw hole position on the template,use an electric drill to drill the hole with a diameter of 6mm and a depth of 25mm.




Insert **plastic wall anchors** into the holes.




Fix A094 with three **ST4x20 crosshead screws** on the wall.




Open the cover of device, then remove the foam of air switch.




Knock a lead hole with the appropriate tool according to the desired wiring position.




Place **silicone pad** for lead hole.




Place **cable gland** or **silicone pad** as the figure shown according to your need.



Connect the provided wire as shown in the figure, then use **M3x5 crosshead screws** and wire fastener to fix the wire on the A094.



Place the battery as shown in the figure, and use the **fixing plate** and **M3x5 crohsshead screws** to fix it.



The installation is done, and please lock the cover.Then remove the protective film.

Device Test

Please verify the device status after installation:
1. Network：While A094 starts up normally,click Search key in the IP Scanner tool to search the IP address into browser to configure the device. Network is working properly if the IP address is obtained.

Warranty

1. Akuvox warranty does not cover intentional mechanical damage or destruction caused by improper installation.
2. Do not attempt to modify, alternate, maintain, or repair device by yourself. Akuvox warranty does not apply to damages caused by anyone who is not representative of Akuvox or an Akuvox authorized service provider. Please contact Akuvox Technical Team if the device need to be repaired.

Get Help

For help or more assistance, contact us at:

https://ticket.akuvox.com/

support@akuvox.com

Scan the QR code to get more videos, guides, and additional product information.

Notice Information

Information contained in this document is believed to be accurate and reliable at the time of printing. This document is subject to change without notice, any update to this document can be viewed on Akuvox' s website: http://www.akuvox.com © Copyright 2024 Akuvox Ltd. All rights reserved.

YS09400000