



No: TBB-GC-021/A-

No	Date	Revision Details
1	22.1.25	Changed the size of the SIM card slot and added a limit strip
2		
3		

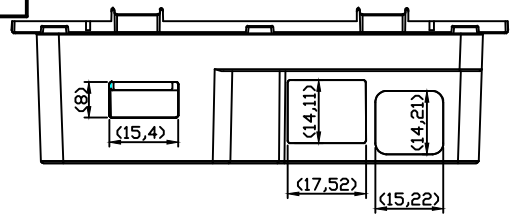

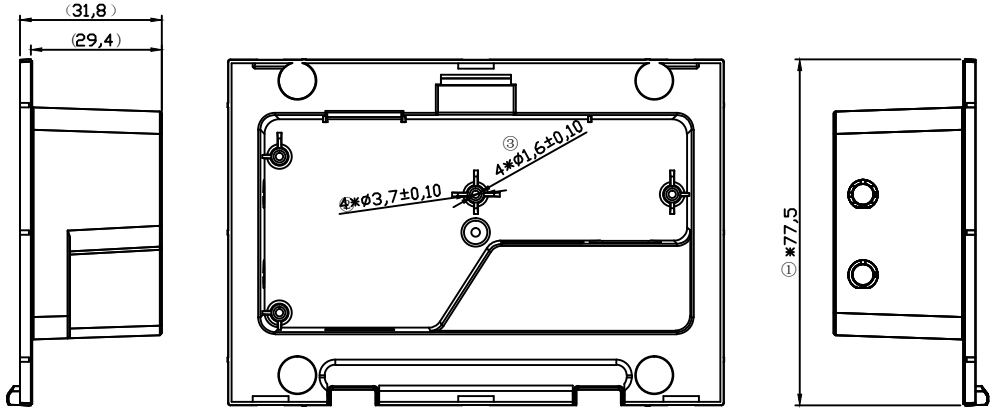

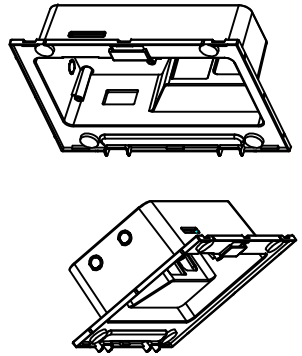

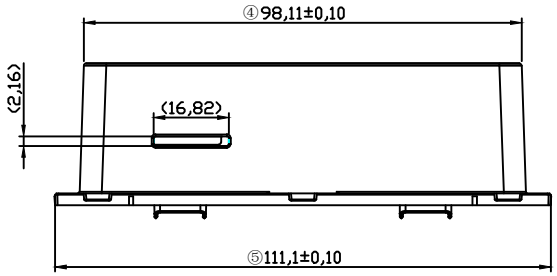

* All batches of incoming materials must be provided with inspection reports for dimensions ① to ⑥.
* Dimensions marked with "*" must be inspected by actual

Technical Requirements:
1.In general, linear dimensional tolerances are inspected according to A, B, or C tolerances. If there is a "p" in the box after A, B, or C tolerances, then the tolerance is inspected according to this letter tolerance.
2. The surface of the product cannot have burrs, shrinkage, deformation, or missing material.
3. Unmarked radii are 0.3 mm, unmarked chamfers are 0.3 mm, unmarked draft angles are 1° to 2°, and unmarked tolerances are ±0.2.
4. Dimensions marked on the drawing are critical dimensions and need to be inspected carefully.
5. All key holes, mating surfaces, and appearance surfaces must be free of burrs. Burrs of 0.2 mm or less are allowed on other parts, provided they do not affect assembly. ：
6. The surface texture of the outer surface is S-1201.

TOLERANCE

UNIT:mm	A☑	B☐	C☐
0-15	±0.10	±0.15	± 1
15-50	±0.25	±0.35	± 3
≥50	±0.35	±0.5	± 5

Designed by	Wu Yifan	Date	2022/1/25
Reviewed by	Lin Genyuan	Date	2022/1/25

Version	Unit	Manufacturing date	First-person view
1.0	mm		

E4 case

Weight		Scale	1:1
Thickness of the board		Material	PC+ABS (AC3100)
Quantity per set	1	Surface treatment	N/A

TBB Renewable (Xiamen) Co., Ltd.

Drawing ID: 021A-

specification: 111*77.5*31.8mm

Part number:20704-0042

TBB POWER