User Manual

Swing Barrier Turnstile

Applicable Model(s): SBT2000S (2023)

Date: May 2024

Doc Version: 1.0

English

Thank you for choosing our product. Please read the instructions carefully before operation. Follow these instructions to ensure that the product is functioning properly. The images shown in this manual are for illustrative purposes only.



For further details, please visit our Company's website www.zkteco.com.

Copyright © 2024 ZKTECO CO., LTD. All rights reserved.

Without the prior written consent of ZKTeco, no portion of this manual can be copied or forwarded in any way or form. All parts of this manual belong to ZKTeco and its subsidiaries (hereinafter the "Company" or "ZKTeco").

Trademark

ZKTeco is a registered trademark of ZKTeco. Other trademarks involved in this manual are owned by their respective owners.

Disclaimer

This manual contains information on the operation and maintenance of the ZKTeco equipment. The copyright in all the documents, drawings, etc. in relation to the ZKTeco supplied equipment vests in and is the property of ZKTeco. The contents hereof should not be used or shared by the receiver with any third party without express written permission of ZKTeco.

The contents of this manual must be read as a whole before starting the operation and maintenance of the supplied equipment. If any of the content(s) of the manual seems unclear or incomplete, please contact ZKTeco before starting the operation and maintenance of the said equipment.

It is an essential pre-requisite for the satisfactory operation and maintenance that the operating and maintenance personnel are fully familiar with the design and that the said personnel have received thorough training in operating and maintaining the machine/unit/equipment. It is further essential for the safe operation of the machine/unit/equipment that personnel has read, understood and followed the safety instructions contained in the manual.

In case of any conflict between terms and conditions of this manual and the contract specifications, drawings, instruction sheets or any other contract-related documents, the contract conditions/documents shall prevail. The contract specific conditions/documents shall apply in priority.

ZKTeco offers no warranty, guarantee or representation regarding the completeness of any information contained in this manual or any of the amendments made thereto. ZKTeco does not extend the warranty of any kind, including, without limitation, any warranty of design, merchantability or fitness for a particular purpose.

ZKTeco does not assume responsibility for any errors or omissions in the information or documents which are referenced by or linked to this manual. The entire risk as to the results and performance obtained from using the information is assumed by the user.

ZKTeco in no event shall be liable to the user or any third party for any incidental, consequential, indirect, special, or exemplary damages, including, without limitation, loss of business, loss of profits, business interruption, loss of business information or any pecuniary loss, arising out of, in connection with, or

 Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

relating to the use of the information contained in or referenced by this manual, even if ZKTeco has been advised of the possibility of such damages.

This manual and the information contained therein may include technical, other inaccuracies or typographical errors. ZKTeco periodically changes the information herein which will be incorporated into new additions/amendments to the manual. ZKTeco reserves the right to add, delete, amend or modify the information contained in the manual from time to time in the form of circulars, letters, notes, etc. for better operation and safety of the machine/unit/equipment. The said additions or amendments are meant for improvement /better operations of the machine/unit/equipment and such amendments shall not give any right to claim any compensation or damages under any circumstances.

ZKTeco shall in no way be responsible (I) in case the machine/unit/equipment malfunctions due to any non-compliance of the instructions contained in this manual (ii) in case of operation of the machine/unit/equipment beyond the rate limits (iii) in case of operation of the machine and equipment in conditions different from the prescribed conditions of the manual.

The product will be updated from time to time without prior notice. The latest operation procedures and relevant documents are available on http://www.zkteco.com

If there is any issue related to the product, please contact us.

ZKTeco Headquarters

Address ZKTeco Industrial Park, No. 32, Industrial Road,
Tangxia Town, Dongguan, China.

Phone +86 769 - 82109991

Fax +86 755 - 89602394

For business-related queries, please write to us at: sales@zkteco.com.

To know more about our global branches, visit www.zkteco.com.

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

About the Company

ZKTeco is one of the world's largest manufacturer of RFID and Biometric (Fingerprint, Facial, Finger-vein) readers. Product offerings include Access Control readers and panels, Near & Far-range Facial Recognition Cameras, Elevator/floor access controllers, Turnstiles, License Plate Recognition (LPR) gate controllers and Consumer products including battery-operated fingerprint and face-reader Door Locks. Our security solutions are multi-lingual and localized in over 18 different languages. At the ZKTeco state-of-the-art 700,000 square foot ISO9001-certified manufacturing facility, we control manufacturing, product design, component assembly, and logistics/shipping, all under one roof.

The founders of ZKTeco have been determined for independent research and development of biometric verification procedures and the productization of biometric verification SDK, which was initially widely applied in PC security and identity authentication fields. With the continuous enhancement of the development and plenty of market applications, the team has gradually constructed an identity authentication ecosystem and smart security ecosystem, which are based on biometric verification techniques. With years of experience in the industrialization of biometric verifications, ZKTeco was officially established in 2007 and now has been one of the globally leading enterprises in the biometric verification industry owning various patents and being selected as the National High-tech Enterprise for 6 consecutive years. Its products are protected by intellectual property rights.

About the Manual

This manual introduces the operations of **SBT2000S (2023) Swing Barrier Turnstile**.

All figures displayed are for illustration purposes only. Figures in this manual may not be exactly consistent with the actual products.

Features and parameters with ★ are not available in all devices.

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

Document Conventions

Conventions used in this manual are listed below:

GUI Conventions

For Software	
Convention	**Description**
Bold font	Used to identify software interface names e.g. **OK**, **Confirm**, **Cancel**.
>	Multi-level menus are separated by these brackets. For example, File > Create > Folder.
For Device	
Convention	**Description**
< >	Button or key names for devices. For example, press <OK>.
[ ]	Window names, menu items, data table, and field names are inside square brackets. For example, pop up the [New User] window.
/	Multi-level menus are separated by forwarding slashes. For example, [File/Create/Folder].

Symbols

Convention	Description
	This represents a note that needs to pay more attention to.
	The general information which helps in performing the operations faster.
	The information which is significant.
	Care taken to avoid danger or mistakes.
	The statement or event that warns of something or that serves as a cautionary example.

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.


Table of Contents


1 OVERVIEW 8
1.1 FEATURES 8
1.2 APPEARANCE AND SYSTEM COMPONENTS 9
1.2.1 APPEARANCE 9
1.2.2 SYSTEM COMPONENTS 10
1.3 TECHNICAL SPECIFICATIONS 11
1.4 MECHANICAL SYSTEM 12
1.5 ELECTRONIC CONTROL SYSTEM 12
1.6 STATUS OF TRAFFIC INDICATOR 12
1.7 WORKING PRINCIPLE 13
2 FUNCTION INTRODUCTION 14
2.1 CARD VERIFICATION 14
2.2 FACE VERIFICATION★ 15
3 CONTROL SYSTEM INTRODUCTION 17
3.1 WIRING DIAGRAM 17
3.2 ACCESS CONTROL BOARD★ 18
3.3 TURNSTILE CONTROL BOARD 19
3.4 MENU OF SPEED GATE 21
3.5 ERROR CODE FOR TURNSTILE 29
4 TROUBLESHOOTING 30
5 MAINTENANCE 31
5.1 CHASSIS MAINTENANCE 31
5.2 MOVEMENT MAINTENANCE 31
5.3 POWER SUPPLY MAINTENANCE 31
6 PACKING LIST 32

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

1 Overview

The SBT2000S (2023) swing barrier turnstile is designed for smooth and silent operation, drawing very little power. It is made of SPCC, it is highly durable. These barriers are normally held in a locked position, denying access to the secured side. When SBT2000S (2023) reader positively recognizes a user's valid access card, its barriers swing automatically, allowing users passage to the secured side. During emergencies, the barriers automatically swing, thereby ensuring users fast unencumbered exit to safety. In an event of power outage, users can easily push through the barrier to exit to safety. The SBT2000S (2023) swing barrier turnstile provides both security and convenient space in a durable and elegant compact design.

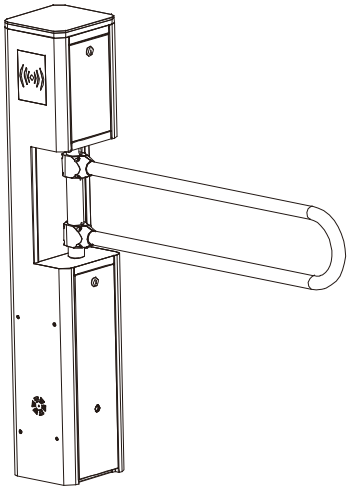

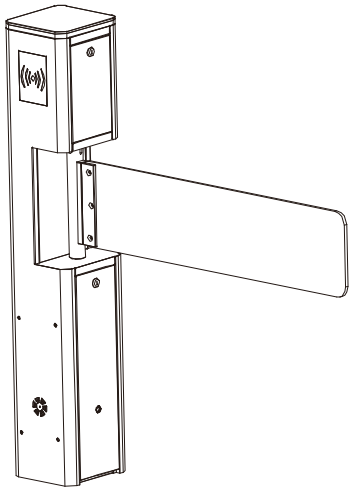

1.1 Features

- **Long Service Life:** The gate can open and close over 5 million times with regular maintenance.
- **High-End Moter:** The motor is driven by a high-end DC brushless motor with a planetary metal gear reducer for high speed, precision, silence and reliable operation.
- **Multi Alarm Functionality:** Alerts break-in, and gate opening/closing delays.
- **Emergency Mode:** Automatically open door during fire alarm or power off.
- **Pass Status Indicator:** Provides visual indication of pass status.
- **Latest Driver Technology:** Adopt the latest driver with RS485 communication protocol, multiple mode switching, with over-current, over-voltage and over-temperature protection.
- **Anti-Pinch Function:** Halts gate closure upon detecting an anti-pinch signal during the closing process.
- **Automatic Reset:** Cancels pass authority automatically if the pedestrian fails to pass within the specified time after a valid card is read.


Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

- **Access Control Capability:** External port allows connection to various biometric devices for access control.


1.2 Appearance and System Components

1.2.1 Appearance

The figure below illustrates the appearance and dimensions of the SBT2000S (2023):

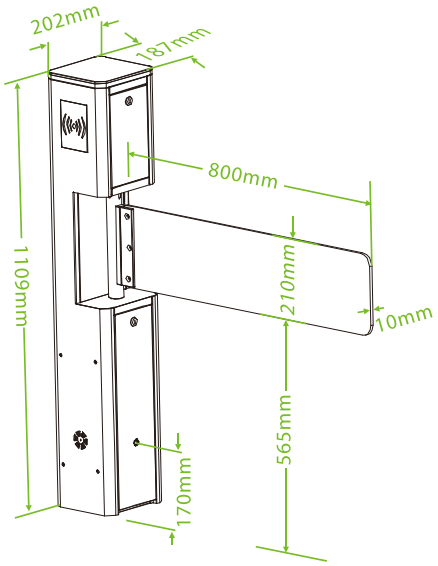

Glass barrier/acrylic (optional)

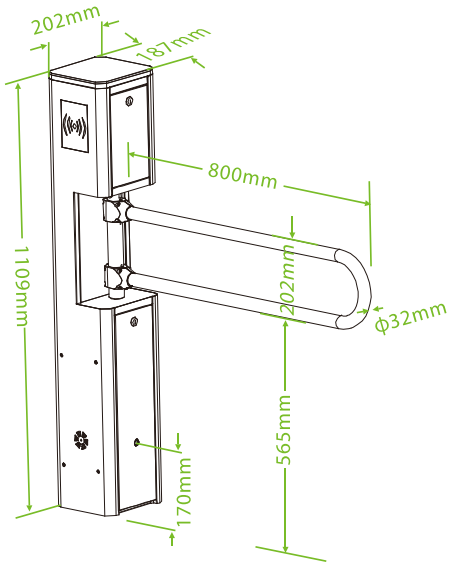


Stainless steel bar

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

1.2.2 System Components

The following figure displays the system components of the SBT2000S (2023):

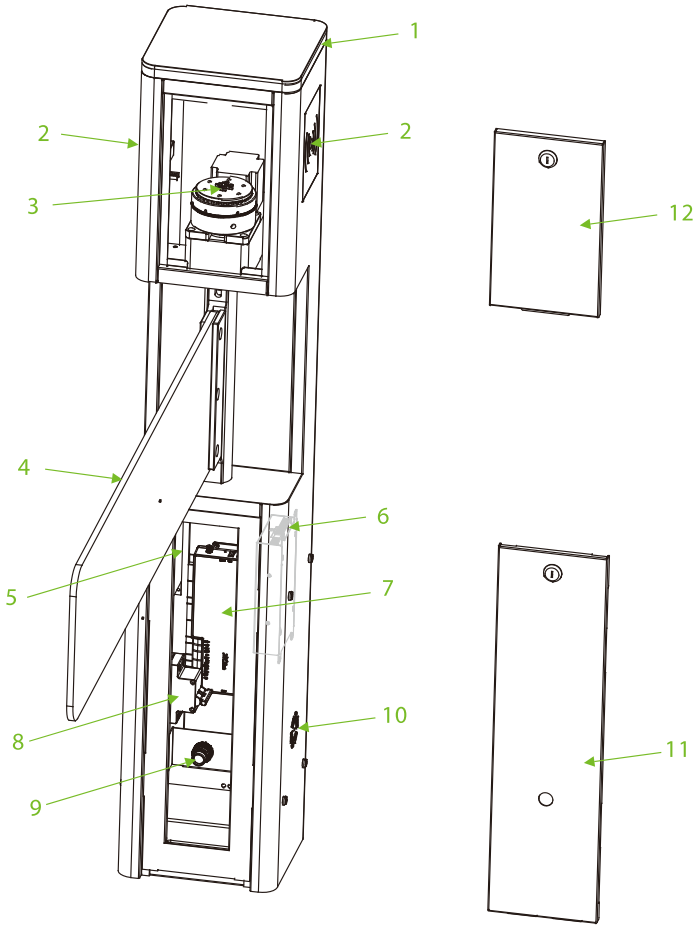

1. Traffic Indicator	**2. Card Verification Area**
3. Motor Driver Kit	**4. Swig Arm**
5. Power Supply	**6. Turnstile Control Board**
7. Access Controller Board★	**8. Air Switch**
9. Infrared Sensor	**10. Speaker**
11. Access Door	**12. Access Door**

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

1.3 Technical Specifications

Feature	Specification
Communication	TCP/IP, RS485
Input Voltage	AC110V/240V, 50/60Hz
Input Control Signal	Dry Contact
Output Voltage	DC 24V
Protection Level	IPX4
Time of Gate Opening/Closing	0.8 to 5 Sec
Operating Humidity	20% to 93% (Non-condensing)
Operating Temperature	-15°C to 60°C
Flow Rate	Normally Close: Maximum 30/minute
Drive Unit	Brushless Motor
Infrared Sensor	1 pair
LED	Support
Working Environment	Indoor and outdoor
Dimension (mm) (L*W*H)	202 x 187 x 1109
Weight	25kg（±5kg）
Noise	＜10dB
MCBF	5 million
Infrared Detection Distance	＜1000mm
Certifications	CE, FCC

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

1.4 Mechanical System

The turnstile's mechanical system consists of the chassis and core component. The chassis serves as a carrier and holds the Traffic Indicator, Reader, Infrared Sensor. and Door lock. The core components are the Motor, Frame, and Swing Arm.

1.5 Electronic Control System

The electronic control system of a swing barrier turnstile mainly consists of the Card Reader, Turnstile Control Board, Access Controller, Infrared Sensor, Traffic Indicator, and Alarm.

Card Reader: The reader reads the data on the card and transmits it to the Access Controller.

Turnstile Control Board: The turnstile control board serves as the control center of the system, receiving signals from the access controller and photoelectric switch. It makes logical judgments and processes these signals, then subsequently sends executive commands to the traffic indicator, motor, and alarm.

Access Controller: This component enhances convenience for authorized personnel by facilitating entry while simultaneously restricting access for unauthorized individuals.


Traffic Indicator: It displays the current passage status of the lane and guides pedestrians to pass through the lane in a safe and orderly manner.

Alarm: This system issues an alarm alert when it detects unauthorized entry or illegal access by pedestrians.


1.6 Status of Traffic Indicator

The swing barrier turnstile is in a working state after power-on self-test. The traffic indicators provide pedestrians with the appropriate passage indications.


Standby:



Pass-through (In/Out):




Alarm:

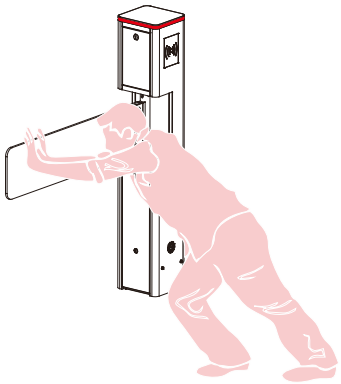

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

1.7 Working Principle

1. When connected to power, the swing barrier turnstile undergoes a Power-On Self-Test. If no issues are detected during this process, the turnstile will operate normally. If a failure is detected, the system will display relevant error messages on the digital tube, allowing the user to quickly identify and resolve the problem.

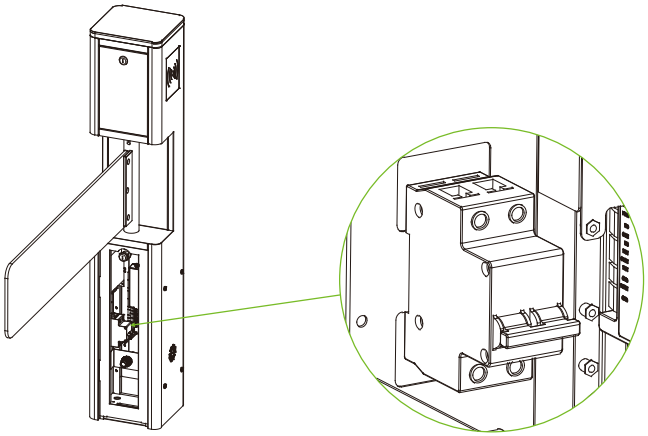

2. When a valid card/Face★ is detected, the buzzer will give a positive audible prompt to the pedestrian, indicating that successfully verified. Then, the card reader/Camera★ sends signals to the Access Controller to request permission to pass through the passage. The Access Controller will send the signal to the Turnstile Control Board.

3. After presenting the valid card/Face★, the turnstile control board receives the signals from the access controller and the infrared sensor. It processes these signals, and then sends out valid control signals to the traffic indicator and the motor. The traffic indicator turns green, and at this time, if the system is in the normally closed mode, the motor operates, and the gate opens.

4. After the passenger passes through the lane in accordance with the opening direction of the swing arm, the Infrared Sensor will continuously monitor the pedestrian's movement throughout the passage. It will continue to send signals to the Turnstile Control Board until the pedestrian completes the passage.

5. If a pedestrian enters the passage without successfully verifying their identification or with an invalid card/Face★, the system will not grant passage. Only when a valid card/Face★ is successfully confirmed will the pedestrian be allowed to pass through the passage.


Note: Make sure the ground wire of the system is securely connected to avoid personal injuries or other accidents.

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

2 Function Introduction

2.1 Card Verification

In card verification mode, the device compares the card number in the card induction area with all the card number data registered in the device and sends it to the access controller. When the user brings the card close to the card reading area, the device enters the card verification mode. When the validation is successful, the traffic indicator of the device turns green, the arm can be pushed, and passage is allowed. In case of validation failure, the traffic indicator turns red, preventing the arm from being pushed, and at the same time, an alarm sounds, and passage is prohibited.

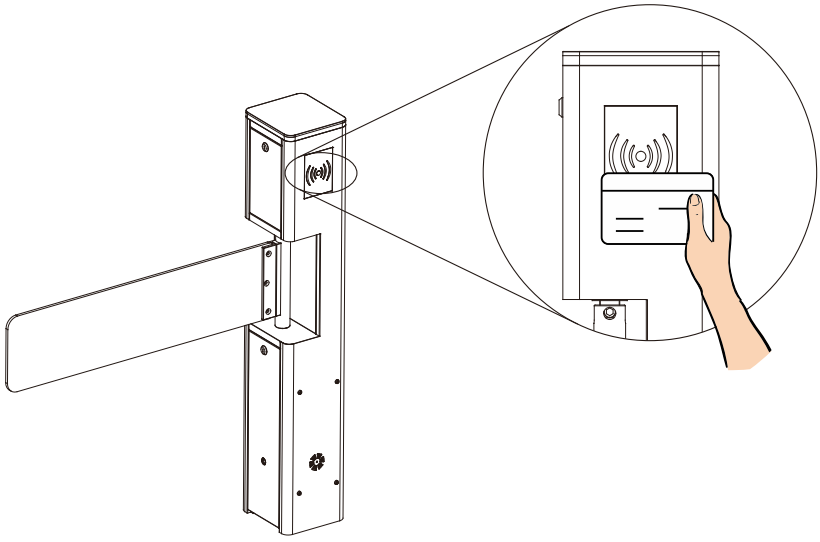





Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

2.2 Face Verification★


In facial verification mode, the device compares the facial template captured by the camera with all the facial data registered in the device and sends it to the access controller. When the verification is successful, the traffic indicator of the device turns green, the arm can be pushed, allowing passage. In case of verification failure, the traffic indicator turns red, preventing the arm from being pushed. and an alarm sounds, prohibiting passage.

During the verification process, please try to center your face on the screen. When registering facial information, please make sure your face is facing the camera and remain still.

Recommended Standing Posture and Facial Expression:




Note: Maintain a natural facial expression and standing posture during both enrollment and verification processes.

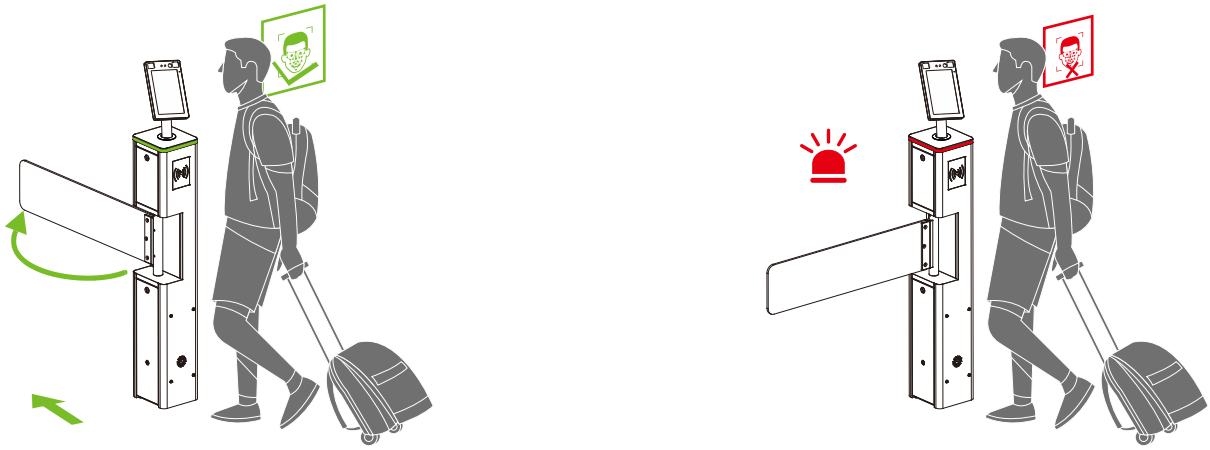

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

Installation on the swing barrier turnstile:


a) Before installation, insert the wire through the bracket.
b) Punch a 30mm diameter mounting hole at the top center of the swing barrier turnstile.
c) Insert the bracket into the hole and fix it with a nut.
d) Adjust the angle of the device.

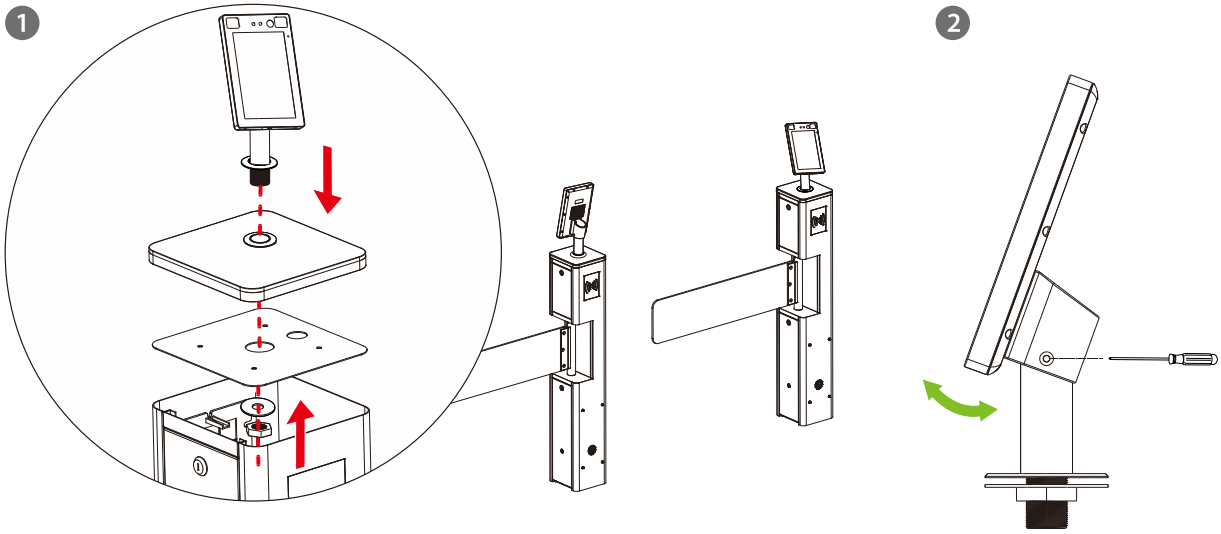

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.


3 Control System Introduction

3.1 Wiring Diagram

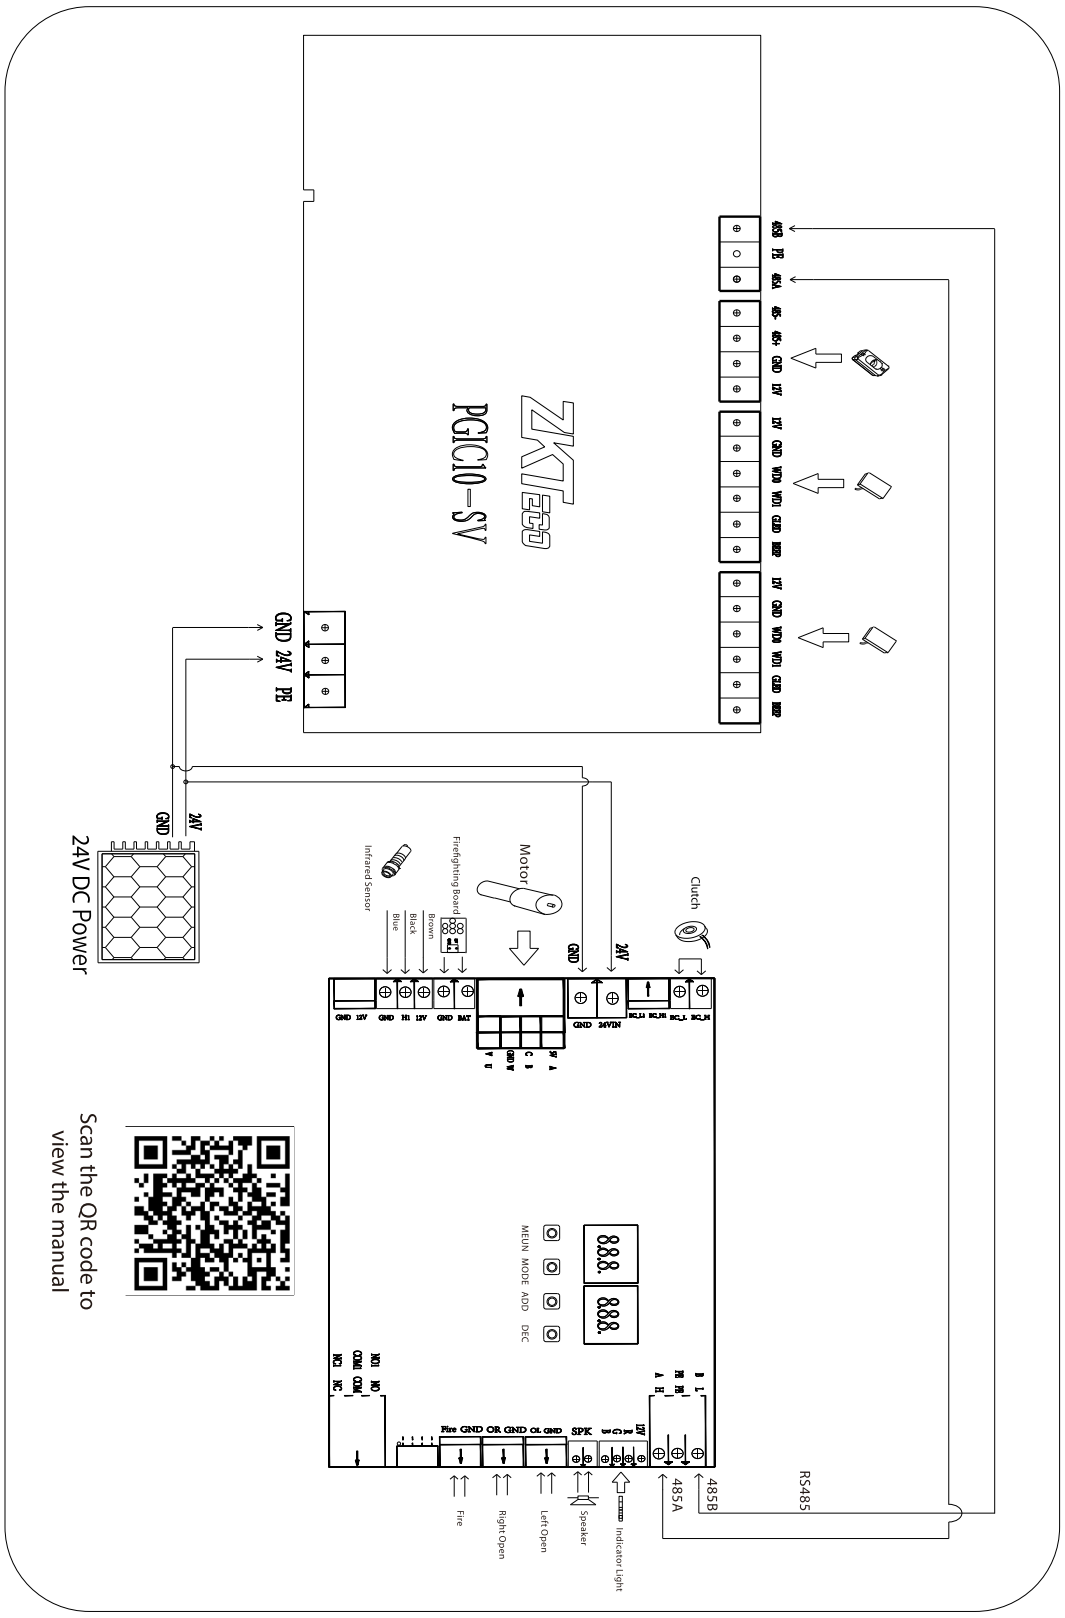

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.


3.2 Access Control Board★

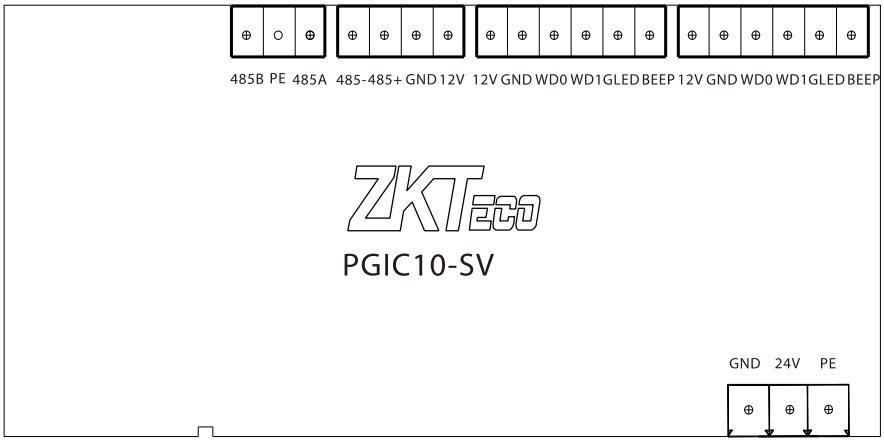

Terminal	Description
485B PE 485A	RS485
485− 485+ GND 12V	485 Reader
12V GND WD0 WD1 GLED BEEP	Wiegand Reader
12V GND WD0 WD1 GLED BEEP	Wiegand Reader
GND 24V PE	24V Power Supply

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

3.3 Turnstile Control Board

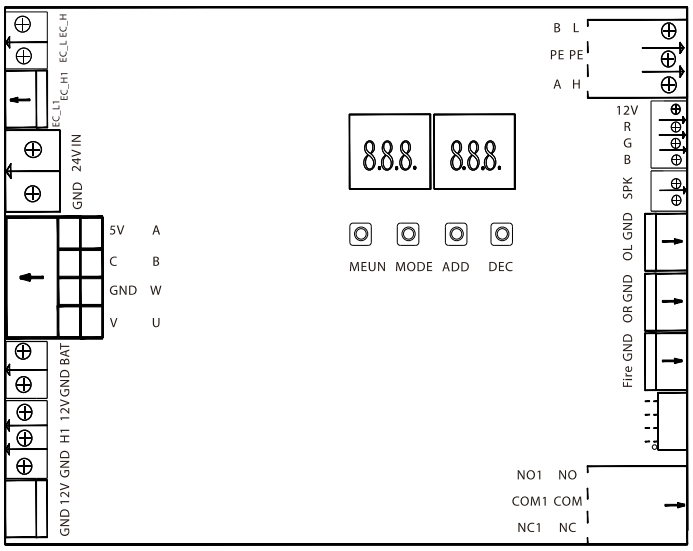



There are 4 keys on the master motor driving controller, "MENU", "MODE", "ADD" and "DEC".

MENU: Used to access the Settings menu and confirm modified values.






MODE: Returns to the previous menu and cancels the current operation.

ADD: Navigate to the upper menu item and increase the value.

DEC: Navigate to the lower menu item and decrease the value.

Terminal	Description
	12V Power Supply Input
	Infrared Sensor
	Firefighting Board
	Motor

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

	24V Power Supply Input
	Clutch
	Clutch
	RS485
	Indicator Light
	Speaker
	Left Open（Out）
	Right Open（In）
	Fire
	Ethernet

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.


3.4 Menu of Speed Gate

Display Mode (01EXXX)

- (01E000) Displays current position of the gate
- (01E001) Infrared input signal
- (01E002) Controls input signal
- (01E003) Test mode (the digital LED displays "---" in the test mode)
- (01E004) Version number (Default)

Opening Mode Setting (02EXXX)


- (02E001) Two-way controlled, both need verification (Default).

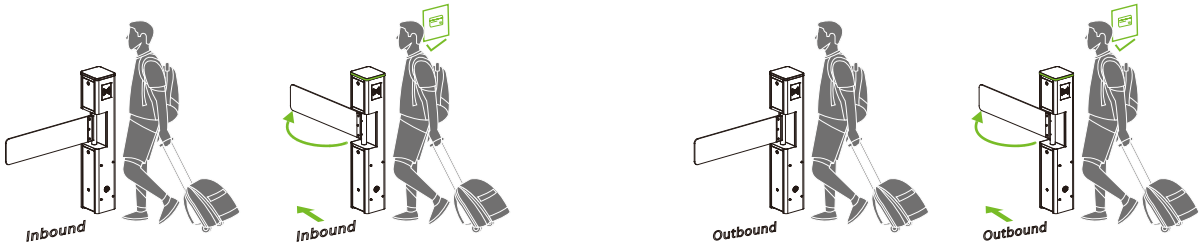

- (02E002) In need verification, out prohibited.





- (02E003) In prohibited, out need verification.

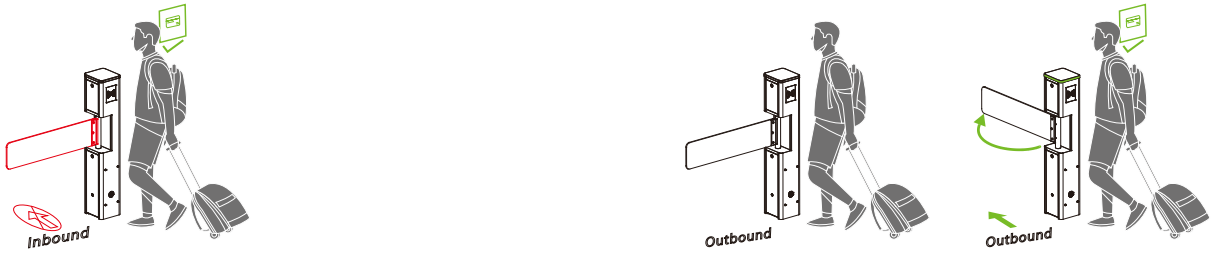


Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

- (02E004) Two-way prohibited.






- (02E005) Two-way normally open.






Gate Opening Speed (03EXXX)


To adjust the gate opening speed, you can set a larger number for a faster opening. The Gate Opening Speed can be configured between 5 and 32, with a default value of 10.

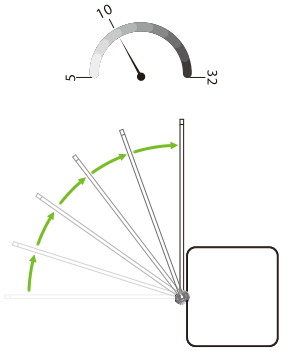


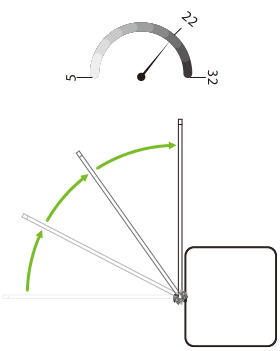

Gate Opening Deceleration Distance (04EXXX)

A larger number increases the deceleration time, enhancing the stability of the swing arm operation. The Gate Opening Deceleration Distance can be set between 0 and 50, with a default value of 10.





Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.


Gate Opening Compensation Speed (05EXXX)

This setting is used when the swing arm cannot fully open or shakes during operation. A larger number of results in faster compensation speed. The Gate Opening Compensation Speed can be set between 0 and 50, with a default value of 12.




Gate Closing Speed (06EXXX)

Set the gate closing speed to close the gate. The larger the number is set, the faster the speed. The Gate Closing Speed value can be set between 5 to 32 and the default value is 10.

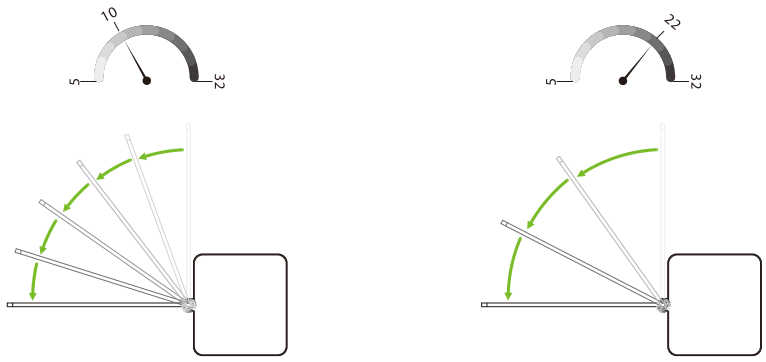

Gate Closing Deceleration Distance (07EXXX)


The larger the number, the longer the deceleration time and the more stable the swing arm operation. The Gate Closing Deceleration Distance value can be set between 0 to 50 and the default value is 10.

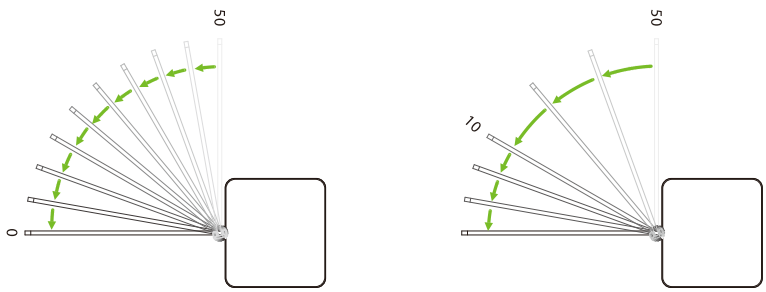

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

Gate Closing Compensation Speed (08EXXX)

It can be set when the swing arm cannot close to the zero position or shakes. The larger the number is set, the faster of the compensation speed. The Gate Closing Compensation Speed value can be set between 0 to 50 and the default value is 12.

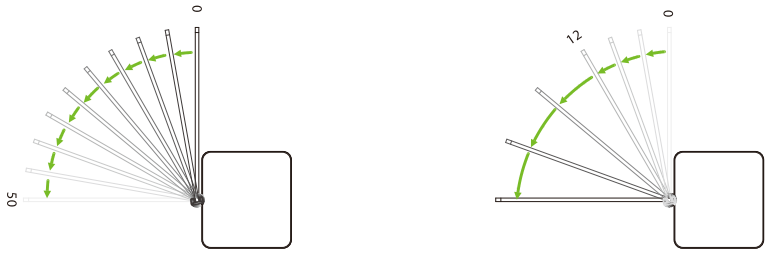

Master/Slave Setting (09EXXX)

Setting up the gate as a master or a slave, the SBT2000S (2023) is an independent system, there is no multi-lane management system, so there is no master-slave relationship.


- (09E000) Master (Default)
- (09E001) Slave

RS485 Address (10EXXX)

It can be set between 0 to 254 and the default value is 0.

Open Duration Time (11EXXX)


The valid time period after a successful verification can be configured. Once the set time is reached, the gate will automatically close. The longer the number set, the longer the valid time. The valid value ranges from 2 to 60 seconds, with a default value of 5 seconds.

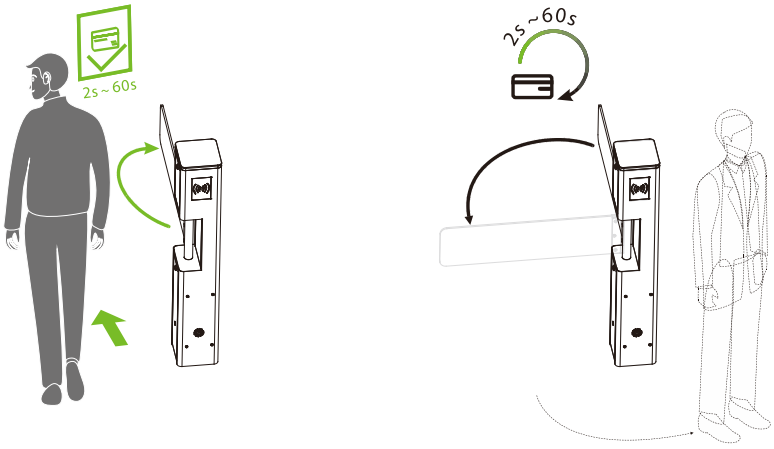

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

Gate Closing Delay Time (12EXXX)

Set the delay time of gate closing after passing. The valid value for gate closing delay time can be set between 2 to 60s and the default value is 2s.

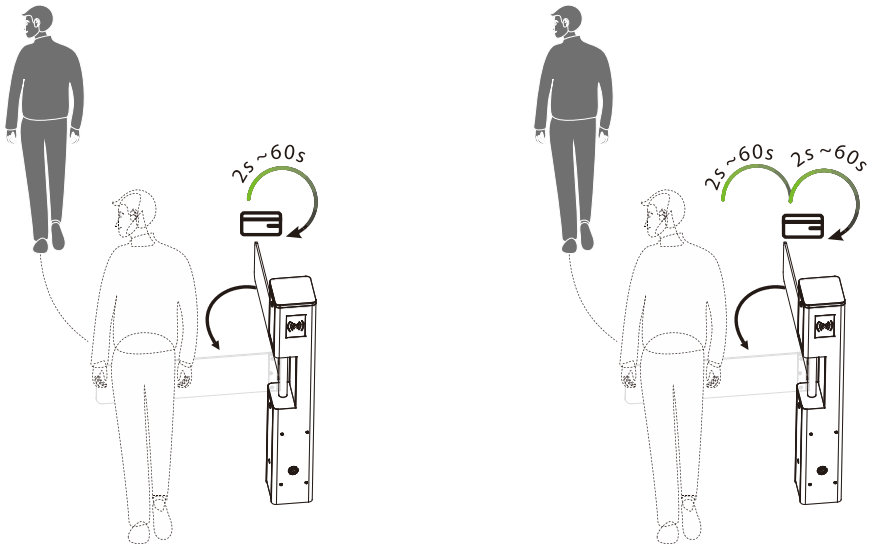


Adjustment Limit (13EXXX)

- (13E001) Zero position (Default)
- (13E002) Right position
- (13E003) Left position
- (13E004) Slave position

1. Adjust the position only when SBT2000S (2023) series is installed properly.
2. When setting the zero position, you can manually push the swing arm for fine-tuning. If the barrier exceeds a certain angle, it will be invalid.

Volume Setting (14EXXX)

Volume Setting is used for adjusting the volume of the device. The larger the number is set, the louder the volume. The valid value for Volume Setting can be set between 1 to 100 and the default value is 70.

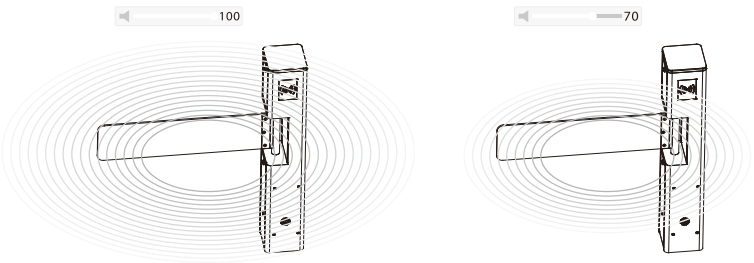


Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.


Close Alarm Tone (15EXXX)

When the alarm tone is turned off, the Turnstile will not emit an alarm tone when encountering an alarm situation. The following figure shows an example of the swipe verification:

- (15E000) Close

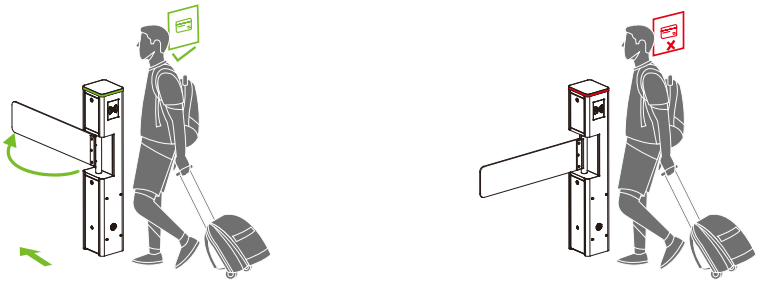


- (15E001) Open (Default)

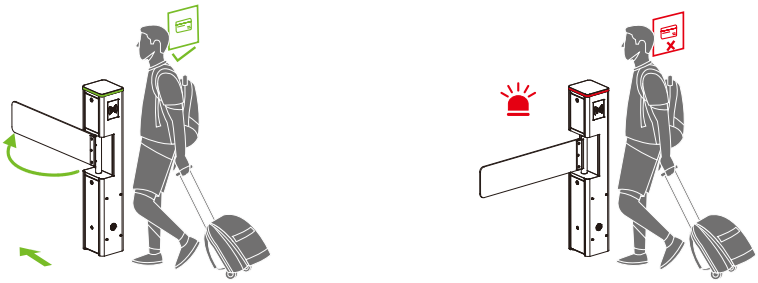

Stay Duration Time (16EXXX)

Set the duration of stay in the lane after successful verification. The valid value for Stay Duration Time can be set between 5 to 30 seconds and the default value is 10s.

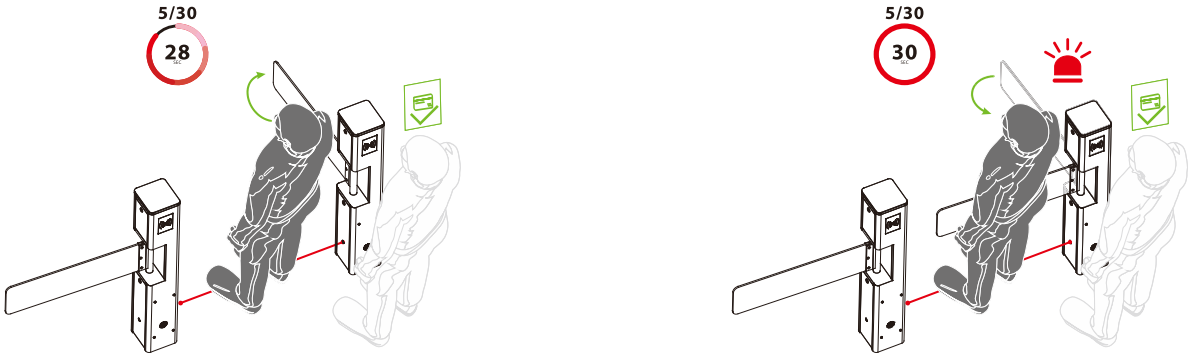

Force Adjustment (17EXXX)


The larger the number, the greater the efficiency of the gate opening and closing force. The valid value for Force Adjustment can be set between 10 to 100 and the default value is 50.

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

Fire Opening Direction (18EXXX)

According to the external fire device, select the corresponding type of trigger mode.

- (18E000) Entry direction (Default)
- (18E001) Exit direction






Clutch Locking Stroke (19EXXX)

Set the angle at which the clutch starts. The larger the number, the bigger the angle. The valid value for Clutch Locking Stroke can be set between 0 to 99, and the default value is 10. When setting it to 0 do not lock it, adapting it to movements without a clutch.

Clutch Locking Mode (20EXXX)

When the gate is unlocked in an unauthorized way, the clutch gets locked automatically. Swipe a valid card to dismiss the alarm.

- (20E000) Delayed unlock (Default)
- (20E001) Authentication to unlock.






Restore Factory Setting (21EXXX)

- (24E001) Restore factory settings.

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

Anti-pinch Action Setting (22EXXX)


- (22E000) Stop
- (22E001) Open (Default)
- (22E002) Close the function

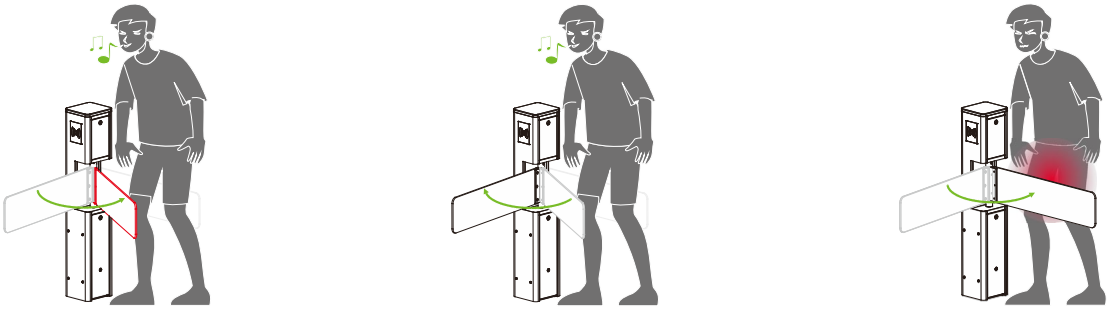


Voice Switching (23EXXX)

Sets whether the device announces a voice or an alarm tone.

- (23E000) Voice playback

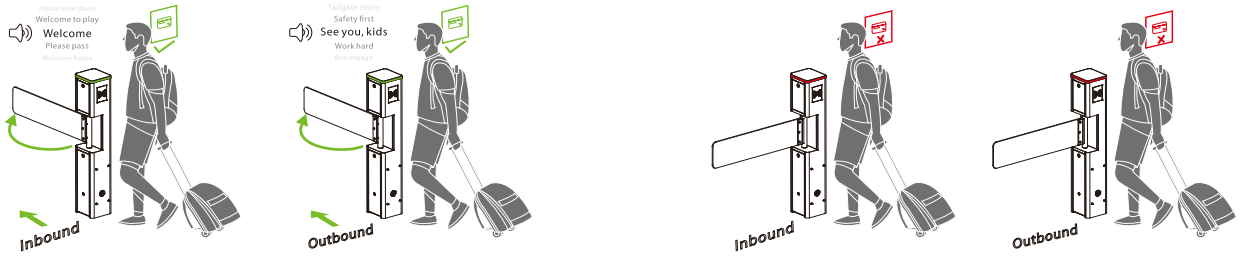

- (23E001) Alarm tone (Default)

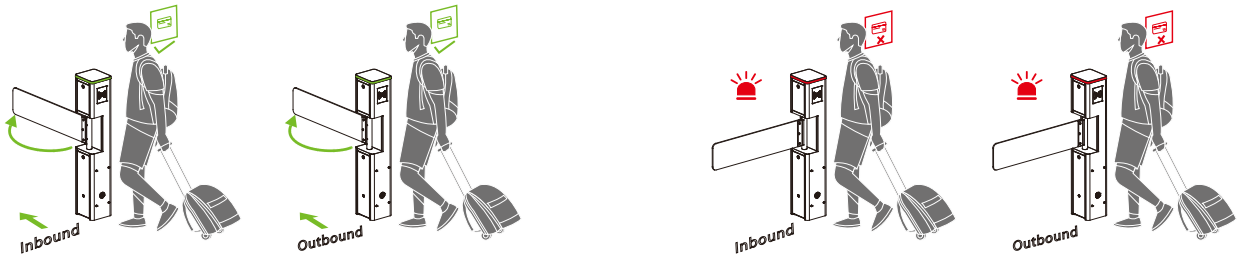

Motor Installation Direction (24EXXX)

- (24E000) Inverted (Default)
- (24E001) Upright

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

Right Synchronous Adjustment (25EXXX)

Set the gate opening compensation speed in the direction the master inbound, the default value is 100, the larger the value, the faster the speed.

Left Synchronous Adjustment (26EXXX)

Set the gate opening compensation speed in the direction the master outbound, the default value is 100, the larger the value, the faster the speed.

Zero Position Strength Adjustment (27EXXX)

Set the strength of the swing arm to return to the zero position, the larger the value, the stronger the strength, the valid value of the zero position strength adjustment is 1 to 10, and the default value is 2.

3.5 Error Code for Turnstile

Error Code	Cause
ER0002	Power-on Self-test failure, Hall Limit Detection Error
ER0004	Run Timeout
ER0008	Clutch Locked
ER016	The code disk detection failed.
ER032	Electric Motor Shaft Lock Protection failure

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

4 Troubleshooting

Failure Description	Solution
The mode indicator light does not respond or the indication is incorrect.	Check that the control panel mode indicator wiring is correct or that the contact is poor.
When the gate is self-tested, the swing arm is not in the normal closing position!	During the self-test, if obstacles are detected, please remove them. Then, restart the self-test after powering on the system.
The gate doesn't open to limit.	If the motor resistance is too high, adjust the minimum compensation speed accordingly.
There's no sound.	Check speakers for loose wiring or turn off sound.
The swing arm is not centered.	To adjust the zero position, navigate to the "Limit Adjustment" menu.
After successful verification, open the gate in the direction of the authorized person.	Access control controller in and out of the open gate signal line is reversed, can be adjusted.
Verification was successful, the gate did not open.	1. Check if it is not exited in the menu setting interface. 2. Check if the gate opening signal line is properly connected to the gate controller. 3. Enter the menu to confirm whether the current access mode is set to prohibit access.

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

5 Maintenance

5.1 Chassis Maintenance

The chassis is made of SPCC. If it has been used for a long time, the surface may develop rust stains. It is recommended to clean the surface regularly with a clean cloth and apply anti-rust oil, making sure not to cover the infrared sensor.

5.2 Movement Maintenance

Before performing maintenance, ensure the power is turned off. Open the door, wipe away surface dust, and apply lubricant for smooth movement.

5.3 Power Supply Maintenance


- Switch off the power supply before conducting maintenance.
- Check the power plug connection ; if loose, securely fix it.
- Do not change any connection position randomly.
- Periodically check the insulation of the external power supply.
- Conduct regular checks for any potential leakage.
- Check if the technical parameters of the interface are normal.
- Check the service life of the electronic components and replace them accordingly.

Caution: All maintenance procedures for the swing barrier mentioned above should be carried out by a professional technician, especially when handling movement and electric control components. To guarantee operational safety, it is crucial to switch off the power supply when the barrier is not in use.

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

6 Packing List

The package consists of the following items:

	SBT2000S (2023)	1
	Power Cable	1
	Card	1
	Keys	2
	Expansion Screw M12*100	4
	Washer	4
	Expansion Screw Washers	4
	Stainless Steel Maintenance Wipes	1
	Hex Wrench	1

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.

ZKTeco Industrial Park, No. 32, Industrial Road,

Tangxia Town, Dongguan, China.

Phone : +86 769 - 82109991

Fax : +86 755 - 89602394

www.zkteco.com

Copyright © 2024 ZKTECO CO., LTD. All Rights Reserved.